



ul. Konstantynowska 79/81  
95-200 Pabianice  
tel/fax 48 42 2270971 POLAND  
e-mail: fif@fif.com.pl

## LK-712 R

30÷130V  
SIGNAL LAMP



[www.fif.com.pl](http://www.fif.com.pl)

F&F products are covered by an 24 months warranty from date of purchase

### PURPOSE

LED LK-712 is used for the optical signals in the presence of voltage in electrical circuit.

### FUNCTIONING

The presence of voltage in the circuit is indicated by shine a red LED.


### ASSEMBLY

1. Take OFF the power.
2. Put on indicator on the rail in the switchgearbox.
3. Connect in parallel to the controlled circuit.

### TECHNICAL DATA

supply	30÷130V AC/DC
voltage indicator	1xLED
power consumption	0,8W
connection	screw terminals 2,5mm <sup>2</sup>
working temperature	-25÷50°C
dimensions	1 module (18mm)
fixing	on rail TH-35

### WIRING DIAGRAM

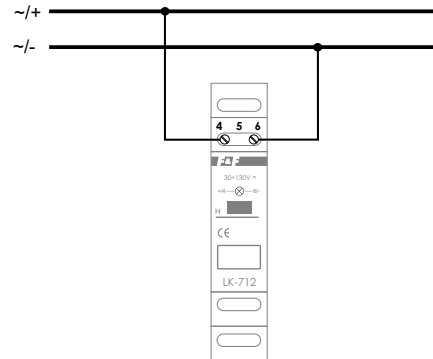

A090728