

53611001	DATA SHEET	
Valid from: 03.07.2018	SKINTOP® DIX-M AUTOMATION	

The SKINTOP® DIX AS-I M is specially developed seal for ASI bus cables and can be used instead of our standard inner seals in the SKINTOP® cable glands. Applications include lead-in cables in e.g. switch cabinets and control panels.

Technical features:

Material	NBR (halogen free, oil resistant)
Size	M20 up to M40
Temperature range	-40 °C up to +100 °C
Colour	Black
Protection class	IP54 acc. to EN 60529
	IP68 can be achieved if the hole is optimally occupied i. e. when using standard ASI cables (5 bar, test acc. to EN 60529)




Norm references:



Creator: T. Dvoutely /PDP Released: DAMU1/PDP	Document: DB53611001EN Version: 02	Page 1 of 3
--	---------------------------------------	-------------


53611001	DATA SHEET	
Valid from: 03.07.2018	SKINTOP® DIX-M AUTOMATION	

SKINTOP® DIX-M ASI

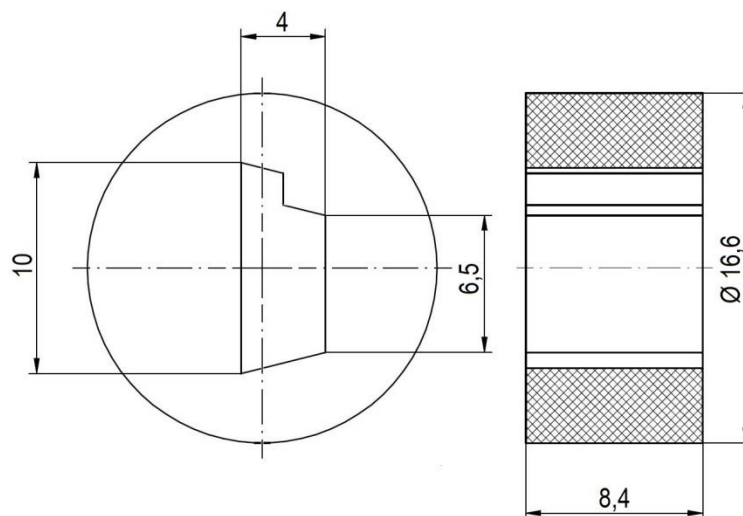

Size	Article No.
M20	53611001

SKINTOP® DIX-M ASI DUO

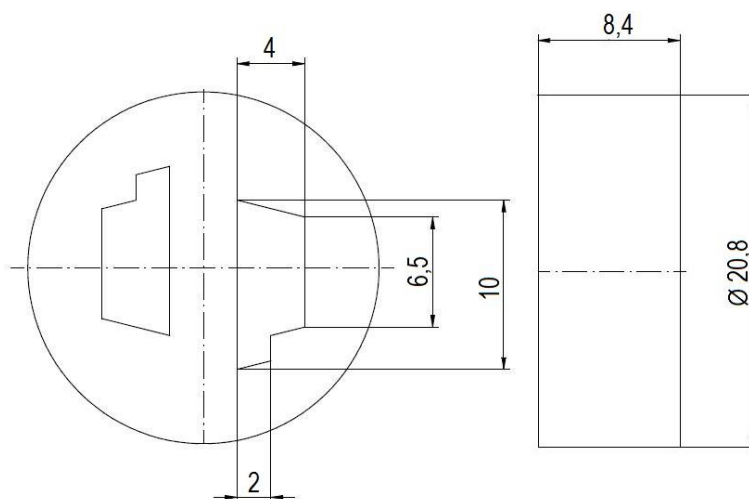


Size	Article No.
M25	53611004

Dimension units: **mm**

Creator: T. Dvoutely /PDP Released: DAMU1/PDP	Document: DB53611001EN Version: 02	Page 2 of 3
--	---------------------------------------	-------------

53611001	DATA SHEET	
Valid from: 03.07.2018	SKINTOP® DIX-M AUTOMATION	

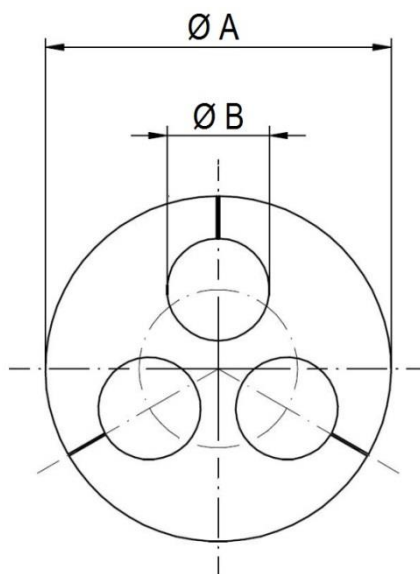

SKINTOP® DIX-M RJ-45

Size	Ø A [mm]	Ø B [mm]	Number of holes	Article No.
M25	20,8	5,4	1	53440980

SKINTOP® DIX-M FIELDBUS

Size	Ø A [mm]	Ø B [mm]	Number of holes	Article No.
M32	25,6	6,5	1	53440970

SKINTOP® DIX-M CUT

Size	Ø A [mm]	Ø B [mm]	Number of holes	Article No.
M40	33,8	10	3	53310444

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: T. Dvouletý /PDP Released: DAMU1/PDP	Document: DB53611001EN Version: 02	Page 3 of 3
--	---------------------------------------	-------------