



TECHNICAL INFORMATION

Watts:	50
Lumens:	6750
Input Power:	AC:100-277V, 50Hz
Long Life:	30,000 Hours
Unit Color:	Grey
Body Type:	Die Cast Aluminium
PF:	>0.9
LED Chip Type:	SMD
CRI:	>80
Operation Temperature:	-20°C to +45°C
Dimmable:	No
Beam Angle:	Type III
Color:	5700K
Dimension:	463x109x418.5mm
lumens per watt:	130


LED LIGHTING

V-TAC's LED Lighting range includes lighting that fulfills the needs of various end-users and industries, offering efficient and innovative products that provide modern solutions at an affordable price. We are proud to also provide extended multi-year warranty on our products, as well as detailed support.

One brand, endless solutions..

SKU: 8679 - 933 939

[View more details](#)

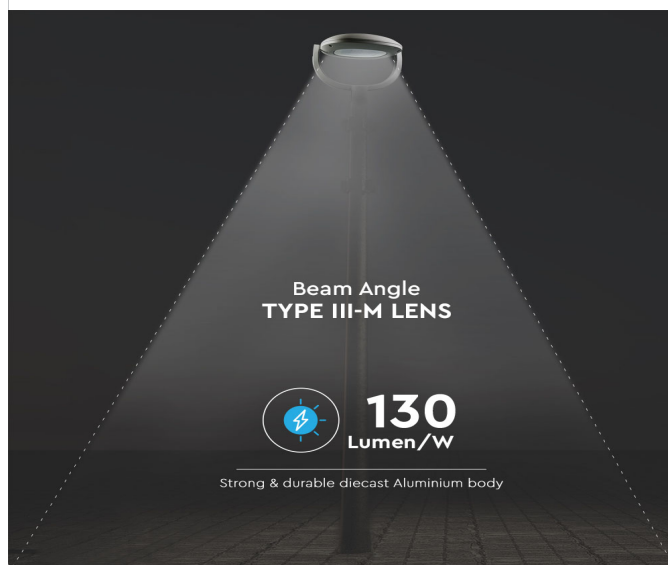

FEATURES

- Powerful LED light source with lumen efficiency of 130 LM/W
- IK protection IK08
- Designed with Type III M Lens
- Surge protection of 4KV/6KV
- Mounting diameter 60mm
- THD 10%@120-240Vac,75%-100%load(45-60W)
- Applications - Streets, Garden, Industrial Facilities, Cross Roads and many more

CE/EMC

CE/LVD



PACKAGING

Gross Weight: 7.29
Unit CBM: 0.051696
Dimension: 463x109x418.5mm

MASTER BOX PACKAGING

Box Qty: 1
Length (Box) mm: 585
Width (Box) mm: 505
Height (Box) mm: 175

LISTING DETAILS

Commodity Code: 9405403990
EanCode: 3800157654463