




ŚRUBOWA KOŃCÓWKA KABLOWA SERIA C do 36 kV

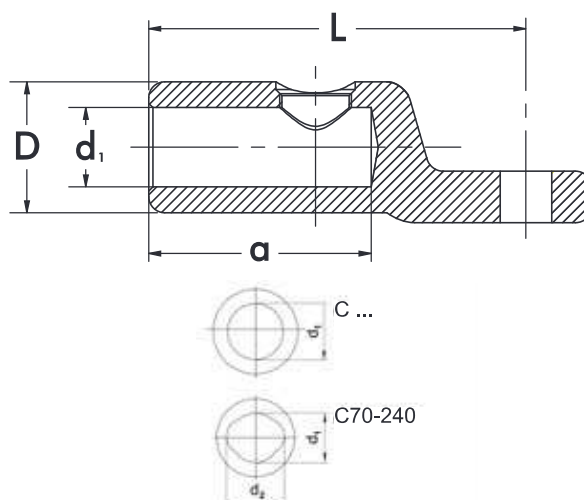

Typ końcówki śrubowej	Przekrój żyły roboczej (mm²)					ilość śrub	Wymiary (mm)				Średnica otworu (mm)
	Aluminium			Miedź			L	d ₁	D	a	
	rm(v)	re	sm	rm(v)	sm						
C16-95x12 C16-95x16	16-95	10-50 i 95	25-70	16-95	25-70	1	60	12,5	24	32	13 17
C25-150x12 C25-150x16	25-150	25-150	25-120	35-120	25-120	1	79	15,5	30	35	13 17
C70-240x12 C70-240x16	(50**)70-240	70-240	70-240	(50**)70-240	70-240	2	93,5	22*	35	56	13 17
C95-240x12 C95-240x16	95-240	95-240	95-185	95-240	95-185	2	95	20	33	56	13 17
C95-300x12 C95-300x16	95-300	95-300	95-240	70-300	70-240	2	105	23	36	67	13 17
C185-400x12 C185-400x16	185-400	185-240 i 400	185-300	185-400	185-300	3	120	26	42	82	13 17
C400-630x12 C400-630x16 C400-630x20	400-630	400-630	400-500	400-630	400-500	3	130	34	52	94	13 17 21
C630-1000x20	630-1000	630-1000		630-800		4	165	41	65	105	21

* Średnica d₂ = 26, ** na zamówienie