

P3500I/O

Compact & Lightweight



POWERRUSH
MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
POWERRUSH increases electrical current upon demand, above rated output when starting electric motors.

FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

POWERRUSH
MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
Powerrush increases electrical current upon demand, above rated output when starting electric motors.



Osiągi

Częstotliwość	Hz	50
Napięcie	V	230
Liczba faz		1
Moc maksymalna	Watts	3300
Moc ciągła	Watts	3000



Silnika

Producent silnika	Pramac	
Typ	OHV	
Zoptymalizowana emisja spalin wg 97/68 50Hz (COM)	Stage V	
Obroty znamionowe	rpm	Variable
Paliwo	Benzyna	
System rozruchu	Ręczny	
Pojemność układu smarowania	l	0.6
Czujnik braku oleju	✓	

Alternatora

Regulacja napięcia	Inverter
--------------------	----------

Dane wymiarowe

Długość	(L) mm	490
Szerokość	(W) mm	430
Wysokość	(H) mm	417
Waga (suchy)	Kg	34
Wymiary kartonu DxSxW	mm	505x445x455

Czas pracy


Pojemność zbiornika paliwa		9
Zużycie paliwa @ 75%	l/h	1.6
Czas pracy przy 75%	h	5.5

Poziom hałas

Gwarantowany poziom hałasu (LWA)	dBA	96
Poziom ciśnienia akustycznego z 7 m	dB(A)	66

GNIAZDA

SCHUKO 230V 16A IP44	2
----------------------	---

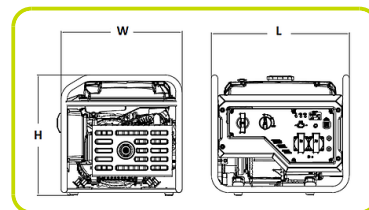

ACCESSORIES CONTROL PANEL

PARALLEL KIT

The Pramac Parallel Kit allows you to double your power when pairing two inverter generators together with the same output*. By connecting two Inverter to one Parallel kit, customers can meet higher output requirements, powering multiple appliances at the same time for a total output of up to two times the rated power output of each individual Inverter.

TECHNICAL DATA

Nominal Tension: 230 V

Frequency: 50 Hz

Phases: 1

Rated Current: 30 A

IP protection: 30

CONTROL PANEL

1 x Schuko 16A (IP44)


1 x CEE 32A (IP44)

CABLES LENGTH: 450 mm

*Important: Applies when pairing two inverter generators with the same output. Parallel kit sold separately.

DIMENSIONS PANEL

Szerokość	(W) mm	250
Wysokość	(H) mm	217
Głębokość	(D) mm	160
Waga	Kg	1.5

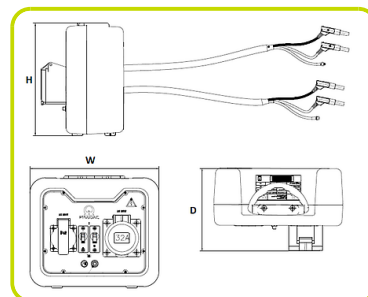

The information is aligned with the Data file at the time of download. Printed on 19/10/2022 (ID 15264)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

