


U

Uchwyt do kabli do mocowania na profilach płaskich

Uchwyt kablów, wykonany ze stali ocynkowanej, przeznaczony do montażu na płaskownikach (maksymalna grubość płaskownika wynosi 12 mm).

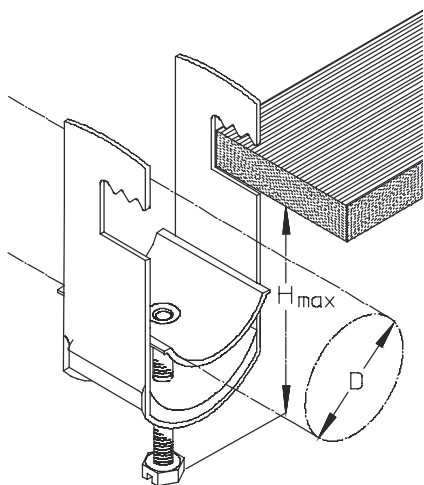

Ocynkowane

Produkt	D	H _{max}	M	Liczba kabli	G
12 U	8-12 mm	41,0 mm	2 Nm	1	3,10 kg/100
16 U	12-16 mm	46,0 mm	2 Nm	1	3,40 kg/100
20 U	16-20 mm	50,0 mm	2 Nm	1	4,80 kg/100
24 U	20-24 mm	54,0 mm	2 Nm	1	4,30 kg/100
28 U	24-28 mm	58,0 mm	2 Nm	1	4,50 kg/100
32 U	28-32 mm	63,0 mm	2 Nm	1	7,10 kg/100
36 U	32-36 mm	67 mm	2 Nm	1	7,90 kg/100
40 U	36-40 mm	73 mm	2 Nm	1	8,10 kg/100
44 U	40-44 mm	81 mm	4 Nm	1	10,50 kg/100
48 U	44-48 mm	85 mm	4 Nm	1	10,80 kg/100
52 U	48-52 mm	90,0 mm	4 Nm	1	11,50 kg/100
56 U	52-56 mm	94,0 mm	4 Nm	1	12,20 kg/100
60 U	56-60 mm	98,0 mm	4 Nm	1	16,80 kg/100
64 U	60-64 mm	102,0 mm	4 Nm	1	17,40 kg/100
70 U	64-70 mm	109,0 mm	4 Nm	1	18,50 kg/100
76 U	70-76 mm	113,0 mm	4 Nm	1	24,8 kg/100
82 U	76-82 mm	119,0 mm	4 Nm	1	27,2 kg/100
88 U	82-88 mm	125,0 mm	4 Nm	1	28,30 kg/100
94 U	88-94 mm	131,0 mm	4 Nm	1	31,00 kg/100
100 U	94-100 mm	137,0 mm	4 Nm	1	33,60 kg/100
110 U	100-110 mm	157,0 mm	4 Nm	1	35,60 kg/100

Strona 1



Produkt	D	H _{max}	M	Liczba kabli	G
120 U	110-120 mm	41,0 mm	4 Nm	1	38,4 kg/100
150 U	145-150 mm	46,0 mm	6 Nm	1	108,2 kg/100
175 U	170-175 mm	50,0 mm	6 Nm	1	133,1 kg/100
12/2 U	8-12 mm	54,0 mm	2 Nm	2	3,9 kg/100
16/2 U	12-16 mm	58,0 mm	2 Nm	2	4,4 kg/100
20/2 U	16-20 mm	63,0 mm	2 Nm	2	5,0 kg/100
24/2 U	20-24 mm	67 mm	2 Nm	2	5,7 kg/100
28/2 U	24-28 mm	73 mm	2 Nm	2	6,1 kg/100
32/2 U	28-32 mm	81 mm	2 Nm	2	9,7 kg/100
36/2 U	32-36 mm	85 mm	2 Nm	2	10,6 kg/100
40/2 U	36-40 mm	90,0 mm	2 Nm	2	11,5 kg/100
44/2 U	40-44 mm	94,0 mm	4 Nm	2	13,4 kg/100
48/2 U	44-48 mm	98,0 mm	4 Nm	2	14,9 kg/100
52/2 U	48-52 mm	102,0 mm	4 Nm	2	15,8 kg/100
56/2 U	52-56 mm	109,0 mm	4 Nm	2	17,0 kg/100
12/3 U	8-12 mm	113,0 mm	2 Nm	3	4,5 kg/100
16/3 U	12-16 mm	119,0 mm	2 Nm	3	5,4 kg/100
20/3 U	16-20 mm	125,0 mm	2 Nm	3	6,2 kg/100
24/3 U	20-24 mm	131,0 mm	2 Nm	3	7,1 kg/100
28/3 U	24-28 mm	137,0 mm	2 Nm	3	7,9 kg/100

Aluminium

Produkt	D	H _{max}	M	Liczba kabli	G
12 U-AL	8-12 mm	41 mm	1,5 Nm	1	1,7 kg/100
16 U-AL	12-16 mm	46 mm	1,5 Nm	1	2,0 kg/100
20 U-AL	16-20 mm	50 mm	1,5 Nm	1	2,3 kg/100
24 U-AL	20-24 mm	54 mm	1,5 Nm	1	2,5 kg/100
28 U-AL	24-28 mm	58 mm	1,5 Nm	1	2,8 kg/100
32 U-AL	28-32 mm	63 mm	1,5 Nm	1	4,1 kg/100
36 U-AL	32-36 mm	67 mm	1,5 Nm	1	4,5 kg/100
40 U-AL	36-40 mm	71 mm	1,5 Nm	1	4,9 kg/100
44 U-AL	40-44 mm	81 mm	3 Nm	1	5,2 kg/100

Strona 2




Produkt	D	H _{max}	M	Liczba kabli	G
48 U-AL	44-48 mm	85 mm	3 Nm	1	5,5 kg/100
52 U-AL	48-52 mm	90 mm	3 Nm	1	6,1 kg/100
56 U-AL	52-56 mm	94 mm	3 Nm	1	6,5 kg/100

Stal nierdzewna, zgodnie z ASTM 304 / BS 304 S 3

Produkt	D	H _{max}	M	Liczba kabli	G
12 U-E	8-12 mm	41 mm	2 Nm	1	2,9 kg/100
16 U-E	12-16 mm	46 mm	2 Nm	1	3,3 kg/100
20 U-E	16-20 mm	50 mm	2 Nm	1	3,7 kg/100
24 U-E	20-24 mm	54 mm	2 Nm	1	4 kg/100
28 U-E	24-28 mm	58 mm	2 Nm	1	4,4 kg/100
32 U-E	28-32 mm	63 mm	2 Nm	1	5,4 kg/100
36 U-E	32-36 mm	67 mm	2 Nm	1	6,7 kg/100
40 U-E	36-40 mm	71 mm	2 Nm	1	7,6 kg/100
44 U-E	40-44 mm	81 mm	4 Nm	1	9,3 kg/100
48 U-E	44-48 mm	85 mm	4 Nm	1	9,9 kg/100
52 U-E	48-52 mm	90 mm	4 Nm	1	11 kg/100
56 U-E	52-56 mm	94 mm	4 Nm	1	11,3 kg/100

D : Średnica
H_{max} : Maksymalna wysokość
M : Moment obrotowy
Liczba kabli : Maksymalna liczba kabli możliwych do zainstalowania w uchwycie
G : Waga

DETALE / ZASTOSOWANIE

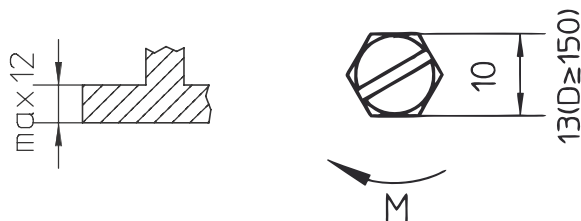



OPCJONALNE AKCESORIA

B 3, B 6, LG 50, LG 60, LG 100

