



Szybkozłączki PC MINI

materiał: poliwęglan


napięcie: 450 V

prąd znamionowy: 24 A

klasa palności: UL94 V-0

temp. pracy: do +85°C

tolerancja: ±5%

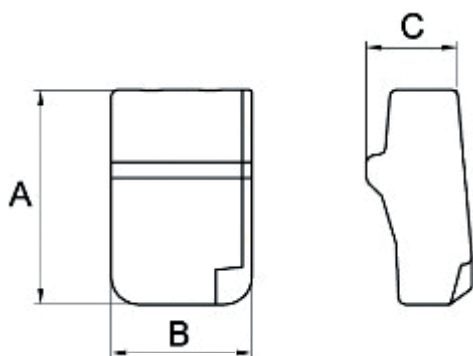

TYP	TYP PRZEWODU	PRZEKRÓJ PRZEWODU [mm ²]	LICZBA PÓŁ	WYMIARY A x B x C [mm]	OPAKOWANIE [szt]	RYSUNEK
PC-212S	drut	0,2 - 2,5	2	17,3 x 10,0 x 6,16	100	
PC-213S	drut	0,2 - 2,5	3	17,3 x 14,0 x 6,16	100	
PC-214S	drut	0,2 - 2,5	4	17,3 x 18,0 x 6,16	100	
PC-215S	drut	0,2 - 2,5	5	17,3 x 22,0 x 6,16	100	
PC-218S	drut	0,2 - 2,5	8	16,0 x 18,0 x 10,80	50	

