



No. 128

PVC insulation tape

for marking, bundling and insulating

Flexible, UV-resistant PVC insulation tape.

Characteristics

- Synthetic rubber adhesive
- Moisture-resistant
- Oil-resistant
- Resistant to dilute acids and alkalis
- Stabilized against UV rays
- High flexibility
- Withstands high electrical stresses
- Good adhesive properties
- Easy processing

Application/Suitability


- Sealing
- Padding of cable insulation
- Bundling
- Reinforcing
- As insulation of electrical and telecommunication cables
- Marking of insulation with high mechanical tension requirements

Test standards


- Approved according VDE

Material

- PVC

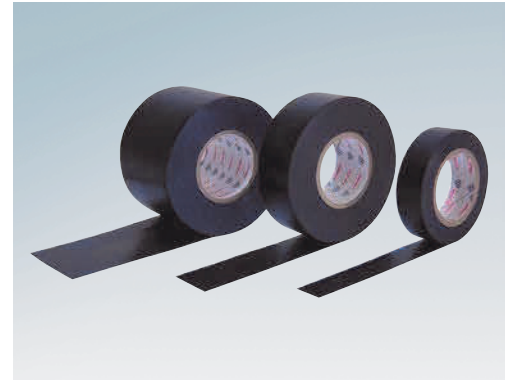

Colours

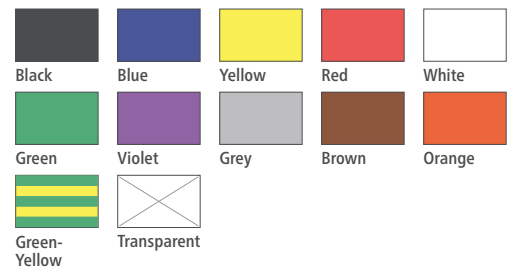

Scope of delivery

PVC insulation tape

Type	Colours	Length m	Width mm	Thickness mm	Art.-No.
No. 128	Black	10	15	0.15	145821
	Blue	10	15	0.15	145825
	Yellow	10	15	0.15	145826
	Red	10	15	0.15	145827
	White	10	15	0.15	145828
	Green	10	15	0.15	145829
	Violet	10	15	0.15	145830
	Grey	10	15	0.15	145831
	Brown	10	15	0.15	145832
	Orange	10	15	0.15	145822
	Green-Yellow	10	15	0.15	145823
	Transparent	10	15	0.15	145824
	Black	10	19	0.15	145806
	Blue	10	19	0.15	145810
	Yellow	10	19	0.15	145811
	Red	10	19	0.15	145812
	White	10	19	0.15	145813
	Green	10	19	0.15	145814
	Violet	10	19	0.15	145815
	Grey	10	19	0.15	145816
	Brown	10	19	0.15	145817
	Orange	10	19	0.15	145807
	Green-Yellow	10	19	0.15	145808
	Transparent	10	19	0.15	145809

→ Continued on the next page



→ Continuation

No. 128 PVC insulation tape

Type	Colours	Length m	Width mm	Thickness mm	Art.-No.
No. 128	Black	25	19	0.15	145794
	Blue	25	19	0.15	145798
	Yellow	25	19	0.15	145799
	Red	25	19	0.15	145800
	White	25	19	0.15	145801
	Green	25	19	0.15	145802
	Violet	25	19	0.15	145803
	Grey	25	19	0.15	145804
	Brown	25	19	0.15	145805
	Orange	25	19	0.15	145795
	Green-Yellow	25	19	0.15	145796
	Transparent	25	19	0.15	145797
	Black	25	25	0.15	145773
	Blue	25	25	0.15	145776
	Yellow	25	25	0.15	145777
	Red	25	25	0.15	145778
	White	25	25	0.15	145779
	Green	25	25	0.15	145780
	Violet	25	25	0.15	145781
	Grey	25	25	0.15	145782
	Brown	25	25	0.15	145783
	Green-Yellow	25	25	0.15	145774
	Transparent	25	25	0.15	145775
	Black	25	30	0.15	145784
	Blue	25	30	0.15	145786
	Yellow	25	30	0.15	145787
	Red	25	30	0.15	145788
	White	25	30	0.15	145789
	Green	25	30	0.15	145790
	Violet	25	30	0.15	145791
	Grey	25	30	0.15	145792
	Brown	25	30	0.15	145793
	Green-Yellow	25	30	0.15	145785
	Black	25	38	0.15	145771
	Black	25	50	0.15	145772

Technical data	Value
min. Elongation at break	170 %
Tensile strength at break	30 MPa
Dielectric strength	40 kV/mm
max. Long-term heat resistance	90 °C
Unwinding force	1.8 N/cm