

Technical data sheet T 25, plug-in seal




The junction boxes are made of a thermoplastic polypropylene polymer with plug-in seals made of ethylene vinyl acetate (EVA). This plastic is soft, which means that it is malleable. This allows installation of cables either directly through the 4 x M25 seals, or the seals can be cut with a knife at the pre-marked points, in order to create an insertion opening for cables or pipes. In addition, cable glands can be inserted through the openings instead of the seals and locked with a locknut from inside.

The cable junction boxes can be screwed onto an M6 thread or mounted on mounting plates in the openings on the floor using steel bolts 3.5 x 9.5.

Clear internal dimensions: Ø63 x 45 mm.

Cover with labelling panel.

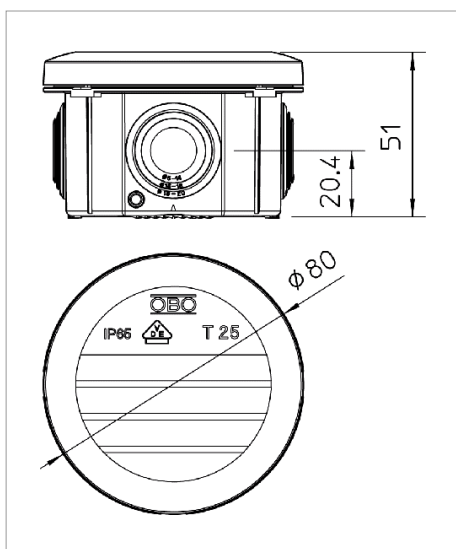

Standard version: flame-resistant, testing temperature 650 °C.

F version: highly flame-resistant, testing temperature 960 °C.

Type	Version	Entries	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 25	Standard	4 x M25	Light grey; RAL 7035	125	5	4.190	2007029
T 25 RW		4 x M25	Pure white; RAL 9010	125	5	4.190	2007509
T 25 F	960 °C flame-resistant	4 x M25	Light grey; RAL 7035	125	5	4.190	2007312
T 25 RO-LGR	With red lid	4 x M25	Red grey	125	5	4.190	2007622
T 25 UV RW	UV-resistant	4 x M25	Pure white; RAL 9010	125	5	4.190	2007408
T 25 KL	With terminal strip	4 x M25	Light grey; RAL 7035	125	5	6.400	2007430

PP Polypropylene

E /100 pc.

