

Technical data sheet T 40, plug-in seal



The junction boxes are made of a thermoplastic polypropylene polymer with plug-in seals made of ethylene vinyl acetate (EVA). This allows installation of cables either directly through the 7 x M25 seals, or the seals can be cut with a knife at the pre-marked points, in order to create an insertion opening for cables or pipes. Alternatively, cable glands can be pushed through the openings instead of the seals and locked with a locknut from the inside.


The junction boxes can be mounted on mounting plates in the openings on the floor using steel screws 3.5 x 9.5.

Clear internal dimensions: 77 x 77 x 46 mm

Cover with labelling panel and lead-sealed.

Standard version: flame-resistant, testing temperature 650 °C.

F version: highly flame-resistant, testing temperature 960 °C.

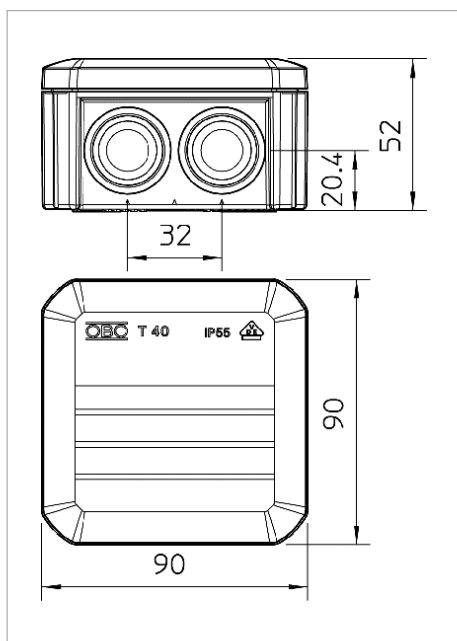

Type	Version	Entries	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 40	Standard	7 x M25	Light grey; RAL 7035	80	5	6.700	2007045
T 40 RW		7 x M25	Pure white; RAL 9010	80	5	6.700	2007517
T 40 F	960 °C flame-resistant	7 x M25	Light grey; RAL 7035	80	5	6.700	2007320
T 40 RO-LGR	With red lid	7 x M25	Red grey	80	5	6.700	2007630
T 40 UV RW	UV-resistant	7 x M25	Pure white; RAL 9010	80	5	6.700	2007410
T 40 KL	With terminal strip	7 x M25	Light grey; RAL 7035	80	5	8.900	2007432

PP Polypropylene

E /100 pc.

