

PGM Pręt gwintowany


Informacje:

Zastosowanie

Podwieszanie tras kablowych.

Materiał

Stal cynkowana galwanicznie.

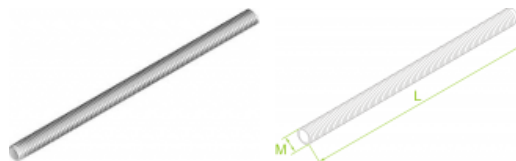

Na zamówienie

E- Stal w gat. A2 lub A4.

KLASA MATERIAŁU 5.8

Wersje:

Symbol	Gwint M [mm]	Długość L [mm]	Siła zrywająca [KN]	Ciężar 1 szt.	Numer katalogowy	Ilość w opakowaniu
PGM 5/ 1	5	1000	7.38	0.12	650101	100
PGM 5/ 2	5	2000	7.38	0.24	650201	50
PGM 6/ 1	6	1000	10.4	0.16	650301	100
PGM 6/ 2	6	2000	10.4	0.23	650401	50
PGM 6/ 3	6	3000	10.4	0.48	651401	50
PGM 8/01	8	100	19	0.03	650501	100
PGM 8/02	8	200	19	0.06	650601	100
PGM 8/03	8	300	19	0.09	650701	50
PGM 8/ 1	8	1000	19	0.32	650801	50
PGM 8/ 2	8	2000	19	0.64	650901	25
PGM 8/ 3	8	3000	19	0.96	651501	25
PGM10/ 1	10	1000	30.2	0.49	651001	25
PGM10/ 2	10	2000	30.2	1.00	651101	25
PGM10/ 3	10	3000	30.2	1.50	651601	25
PGM12/ 1	12	1000	43.8	0.72	651201	25
PGM12/ 2	12	2000	43.8	1.44	651301	20
PGM12/ 3	12	3000	43.8	2.16	651701	10