


# XS7C40PC440

inductive sensor XS7 40x40x117 - plastic -  
Sn15mm - 12..48VDC - terminals

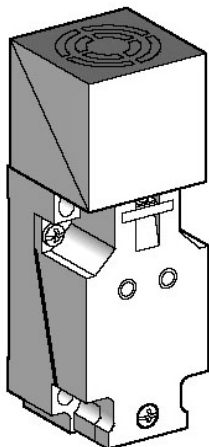

## Main

Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Product specific application	-
Sensor name	XS7
Sensor design	Form 40 x 40 x 117
Size	117 mm
Body type	Fixed
Enclosure material	Plastic
Type of output signal	Discrete
Wiring technique	4-wire
[Sn] nominal sensing distance	15 mm
Discrete output function	1 NO + 1 NC
Discrete output type	PNP
Electrical connection	Screw-clamp terminals , clamping capacity: 4 x 1.5 mm <sup>2</sup>
[Us] rated supply voltage	12...48 V DC with reverse polarity protection
Switching capacity in mA	≤ 200 mA with overload and short-circuit protection
IP degree of protection	IP67 conforming to IEC 60529

## Complementary

Detection face	5 positions turret head
Detector flush mounting acceptance	Flush mountable
Material	Plastic
[Sd] sensing range	> 8...15 mm
Operating zone	0...12 mm
Differential travel	3...20% of Sr
Repeat accuracy	≤ 3% of Sr
Output circuit type	DC
Status LED	1 LED yellow for output state 1 LED green for supply on
Supply voltage limits	10...58 V DC
Switching frequency	≤ 1000 Hz
Voltage drop	≤ 2 V at closed state
Current consumption	0...10 mA at no-load
Delay first up	≤ 5 ms
Delay response	≤ 0.3 ms
Delay recovery	≤ 0.7 ms
Marking	CE
Height	117 mm
Width	40 mm
Product weight	0.22 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended to be used for specific user applications. It is the duty of any user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Product certifications	C-Tick CCC CSA UL
Ambient air temperature for operation	-25...70 °C
RoHS EUR conformity date	0836
RoHS EUR status	Compliant