


ONTEC R



M2



Wymiary [mm]
Dimensions [mm]

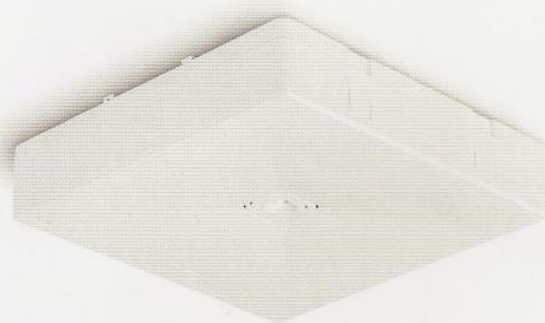

zestaw do montażu wpuszczanego
nr / no.: TM-AKC.MC.OR.01
EAN: 5902052564170

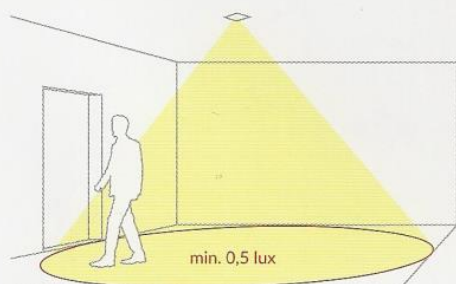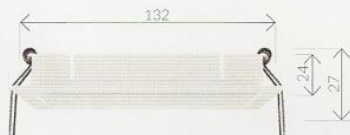

oświetlenie antypaniczne (261 lm) – pomieszczenia typu open space
antipanic lighting (261 lm) - open space areas

Model		NR NO.	EAN
ONTEC R M2 102 M AT	1h	TM-OA.ORM2.L1H1AT2W	5902052556816
ONTEC R M2 102 M DATA	1h	TM-OA.ORM2.L1H1DT2W	5902052550364
ONTEC R M2 102 M DATA 2	1h	TM-OA.ORM2.L1H1D22W	5902052550371
ONTEC R M2 302 M AT	3h	TM-OA.ORM2.L1H3AT2W	5902052556823
ONTEC R M2 302 M DATA	3h	TM-OA.ORM2.L1H3DT2W	5902052550388
ONTEC R M2 302 M DATA 2	3h	TM-OA.ORM2.L1H3D22W	5902052550395
ONTEC R M2 02 CB	-	TM-OA.ORM2.01H0CBW	5902052550401

Parametry techniczne: Technical parameters:		Certyfikaty Certificates
Zastosowanie Application	Oświetlenie antypaniczne Antipanic lighting	 
Zródło światła Light source	LED	
Czas pracy akumulatora Battery operating time	1h / 3h	
Tryb pracy Mode	M	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-2-13, PN-EN 61347-1, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471
Strumień Luminous flux	261 lm	
Testowanie Testing	AT – autotest, DATA/DATA 2 – centralny monitoring / central monitoring, CB – centralna bateria / central battery	Pakowanie Packaging
Zasilanie Power supply	230 V AC $\pm$ 10% / 50 - 60Hz	 140 x 140 x 40  1000 szt. / pcs
Stopień szczelności Protection degree	IP20	
Klasa izolacji Insulation class	II	
Zakres temperatury pracy Temperature range	t _a +10 °C $\pm$ +35 °C CB: t _a -15 °C $\pm$ +55 °C	
Kolor obudowy Colour	☐ RAL 9003 ☒ kolor specjalny / special colour	

Fotometria Photometry

H	A	B	C	D
2,5	3,8	8,1	8,1	3,8
3,0	4,2	9,3	9,3	4,2
4,0	4,7	11,4	11,4	4,7
5,0	4,8	13	13	4,8
6,0	4,8	13,8	13,8	4,8
7,0	4,8	14,5	14,5	4,8
8,0	4,8	14,7	14,7	4,8

