

WOKS - Wentylator przemysłowy



Wersje standardowe

007-0090	WOKS Ø200
007-0091	WOKS Ø250
007-0092	WOKS Ø300
007-0093	WOKS Ø350
007-0094	WOKS Ø400
007-0095	WOKS Ø450
007-0500	WOKS Ø500
007-0501	WOKS Ø550
007-0502	WOKS Ø630
007-0503	WOKS Ø710
007-0504	WOKS Ø800




**Dostępne
kolory:**
czarny

**Typ
łożyska**
łożysko
kulkowe

Material:

blacha
stalowa
malowana
proszkowo

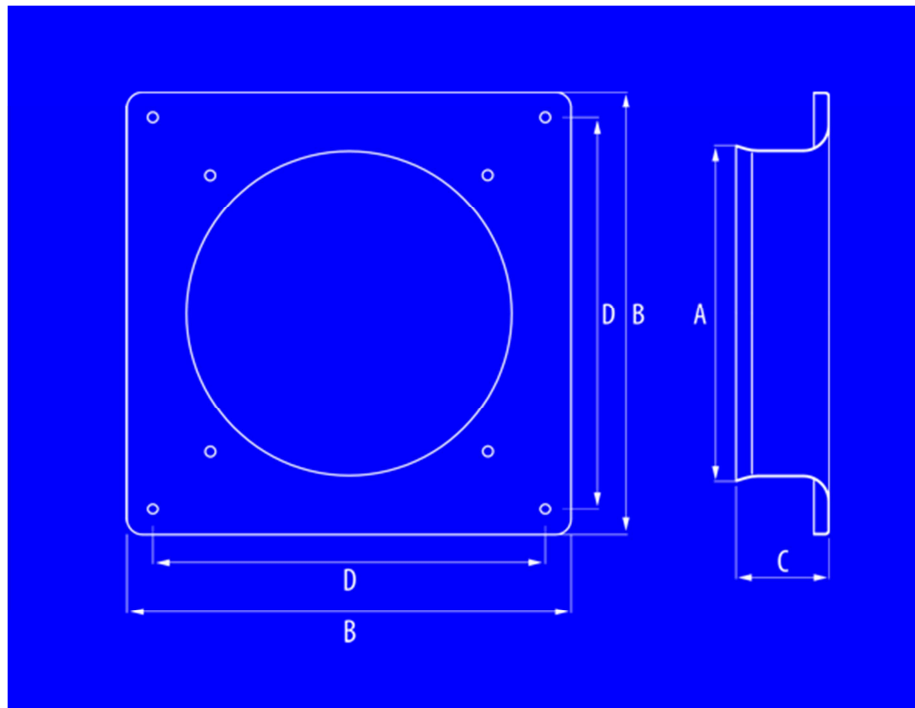

	ØA	B	C	D
WOKS Ø200	212	318	55	260
WOKS Ø250	260	370	90	320
WOKS Ø300	326	430	90	380
WOKS Ø350	360	485	90	433
WOKS Ø400	410	538	110	490
WOKS Ø450	458	576	105	525
WOKS Ø500	515	655	115	615
WOKS Ø550	575	725	115	670
WOKS Ø630	650	805	125	750
WOKS Ø710	725	850	130	810
WOKS Ø800	835	970	200	910

typ	jedn.	WOKS Ø200	WOKS Ø250	WOKS Ø300	WOKS Ø350	WOKS Ø400	WOKS Ø450
wydatek powietrza	m ³ /h	850	1600	2400	3100	3400	4800
ciśnienie statyczne	Pa	130	160	220	140	200	240
ciśnienie statyczne	mmH ₂ O	13,26	16,31	22,43	14,28	20,39	24,47
ciśnienie akustyczne	dB(A)	63	67	73	64	69	73
napięcie zasilania	V/Hz	230/50	230/50	230/50	230/50	230/50	230/50
obroty silnika	rpm	2300	2480	2580	1400	1430	1420
moc	W	55	90	145	140	140	250
pobór prądu	A	0,26	0,45	0,62	0,60	0,60	1,10
max. temp. pracy	°C	70	70	70	45	40	40
waga	kg	2,92	3,93	4,90	6,71	8,00	9,51
stopień ochrony	IP	X4	X4	X4	X4	X4	X4
klasa izolacji		I	I	I	I	I	I
typ	jedn.	WOKS Ø500	WOKS Ø550	WOKS Ø630	WOKS Ø710	WOKS Ø800	
wydatek powietrza	m ³ /h	6000	7560	10080	Δ15500 Y12200	Δ19000 Y14800	
ciśnienie statyczne	Pa	110	110	170	Δ130 Y130	Δ170 Y1700	
ciśnienie statyczne	mmH ₂ O	11.22	11.22	17.32	13.26	17.32	
ciśnienie akustyczne	dB(A)	72	75	78	80	82	
napięcie zasilania	V/Hz	230/50	230/50	230/50	380/50	380/50	
obroty silnika	rpm	1300	1300	1360	Δ900 Y730	Δ920 Y770	
moc	W	420	550	750	Δ900 Y650	Δ1200 Y930	
pobór prądu	A	1.95	2.55	3.55	Δ1.90 Y1.60	Δ2.85 Y1.60	
max. temp. pracy	°C	60	60	60	60	60	
waga	kg	12.80	17.20	23.20	37.80	42.40	
stopień ochrony	IP	X4	X4	X4	X4	X4	
klasa izolacji		I	I	I	I	I	