




DL 220 with plain glossy reflector.



Recessed downlight for compact fluorescent lamps. Body (standard zink, painted black on request) and ring (standard white, other colours on request) are made of steel. Reflector made of aluminium.

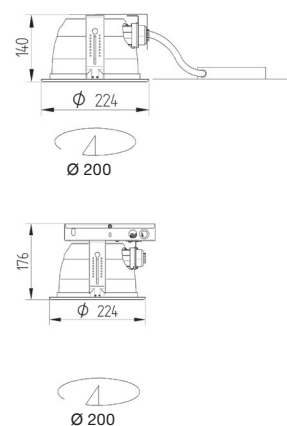

Easy installation – without tools.

Diamond faceted reflector (F).


Mounting brackets.

DL 220 - HIGH VERSION

Index no.	Lamp	Weight	Socket
F04.220.6482V	VVG, 1x13W TC-D	1,60 kg	G24d - 1
F04.220.6482E	EVG, 1x13W TC-DEL	1,45 kg	G24q - 1
F04.220.6480V	VVG, 1x18W TC-D	1,60 kg	G24d - 2
F04.220.6480E	EVG, 1x18W TC-DEL	1,45 kg	G24q - 2
F04.220.6580V	VVG, 1x26W TC-D	1,80 kg	G24d - 3
F04.220.6580E	EVG, 1x26W TC-DEL	1,50 kg	G24q - 3
F04.220.6492V	VVG, 2x13W TC-D	1,90 kg	G24d - 1
F04.220.6492E	EVG, 2x13W TC-DEL	1,60 kg	G24q - 1
F04.220.6490V	VVG, 2x18W TC-D	1,90 kg	G24d - 2
F04.220.6490E	EVG, 2x18W TC-DEL	1,60 kg	G24q - 2
F04.220.6590V	VVG, 2x26W TC-D	2,10 kg	G24d - 3
F04.220.6590E	EVG, 2x26W TC-DEL	1,60 kg	G24q - 3
With plain glossy reflector.			
G04.220.6482V	VVG, 1x13W TC-D	1,60 kg	G24d - 1
G04.220.6482E	EVG, 1x13W TC-DEL	1,45 kg	G24q - 1
G04.220.6480V	VVG, 1x18W TC-D	1,60 kg	G24d - 2
G04.220.6480E	EVG, 1x18W TC-DEL	1,45 kg	G24q - 2
G04.220.6580V	VVG, 1x26W TC-D	1,80 kg	G24d - 3
G04.220.6580E	EVG, 1x26W TC-DEL	1,50 kg	G24q - 3
G04.220.6492V	VVG, 2x13W TC-D	1,90 kg	G24d - 1
G04.220.6492E	EVG, 2x13W TC-DEL	1,60 kg	G24q - 1
G04.220.6490V	VVG, 2x18W TC-D	1,90 kg	G24d - 2
G04.220.6490E	EVG, 2x18W TC-DEL	1,60 kg	G24q - 2
G04.220.6590V	VVG, 2x26W TC-D	2,10 kg	G24d - 3
G04.220.6590E	EVG, 2x26W TC-DEL	1,60 kg	G24q - 3

For decorative accessories see page 79.

All downlights are available with remote gearbox. Please add RGB after index nr.

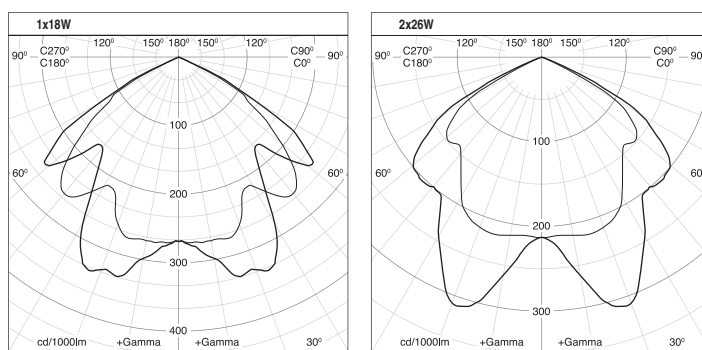

Technical extras upon request:

- Emergency supply
 - battery pack 1h
 - battery pack 2h
 - battery pack 3h

Please add EM1, EM2 or EM3 after index number.

- Compensation or passive power (capacitor).
Please add COMPENSATION after index number.

- Dimmable ballast EVG DIM (1-10 V).
Please add EVG DIM after index number.

- Digital dimmable ballast (DALI).
Please add DALI after index number.