




Śruba naprężna L- 200 M 8

34 L-200 M8

L	L1
200	100

Materiał:

- cynkowanie elektrolityczne (OC)
- cynkowanie ogniowe (na zamówienie)

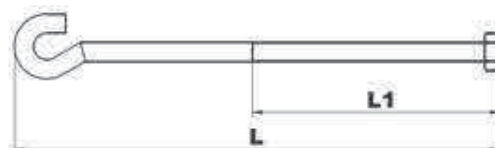


Śruba naprężna L- 300 M 10

35 L-300 M10

L	L1
300	100

Materiał:

- cynkowanie elektrolityczne (OC)
- cynkowanie ogniowe (na zamówienie)

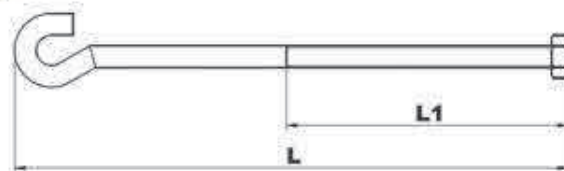


Śruba odciągowa

		L	L1	L2
35a	Ø16 L-150	150	100	250
35b	Ø16 L-210	210	100	310
35c	Ø16 L-260	260	100	360
35d	Ø16 L-300	300	100	400
35e	Ø16 L-360	360	100	460
35f	Ø16 L-420	420	100	520

Materiał:

- cynkowanie elektrolityczne (OC)
- cynkowanie ogniowe (na zamówienie)

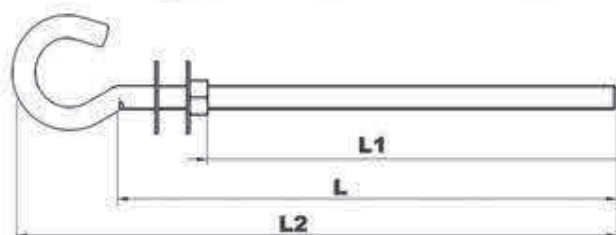

Śruba naprężna dwustronna

		Lmin	Lmax	S
36	M8	180	260	23
37	M10	200	290	30
38	M12	240	320	34
39	M16	300	420	42

Materiał:

- cynkowanie elektrolityczne (OC)
- cynkowanie ogniowe (na zamówienie)

