



Type: **IS-40/4**
Article No.: **276273**

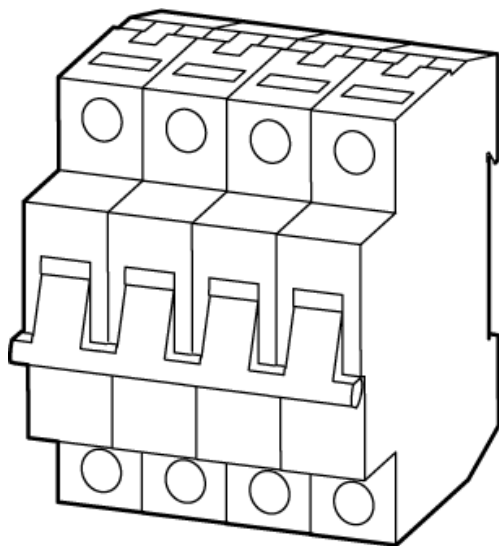

Ordering information

Rated uninterrupted current	I_u	A	40
Pole			4

Note concerning the product



Electrical

Rated operational voltage			
Rated operating voltage		V AC	240/415
Rated frequency	f	Hz	50/60
Rated insulation voltage	U_i	V AC	690
Pole			4-pole
Max. admissible back-up fuse		A gL	125


Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	17.5/per pole
Mounting			IEC/EN 60715 top-hat rail

Degree of protection			
Integrated			IP40
Terminal protection			Protection against electric shock to IEC 536
Terminal capacities			
Solid		mm ²	50
flexible		mm ²	50

Dimensions

Dimensions

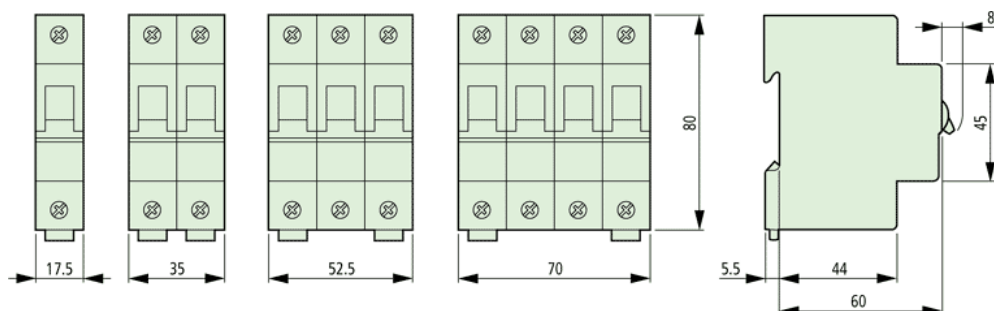

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn

E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>

Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3