

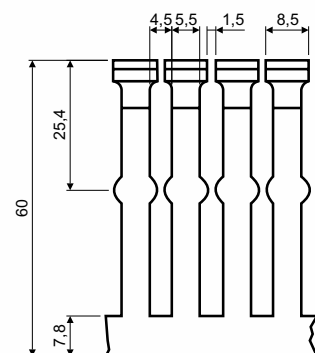

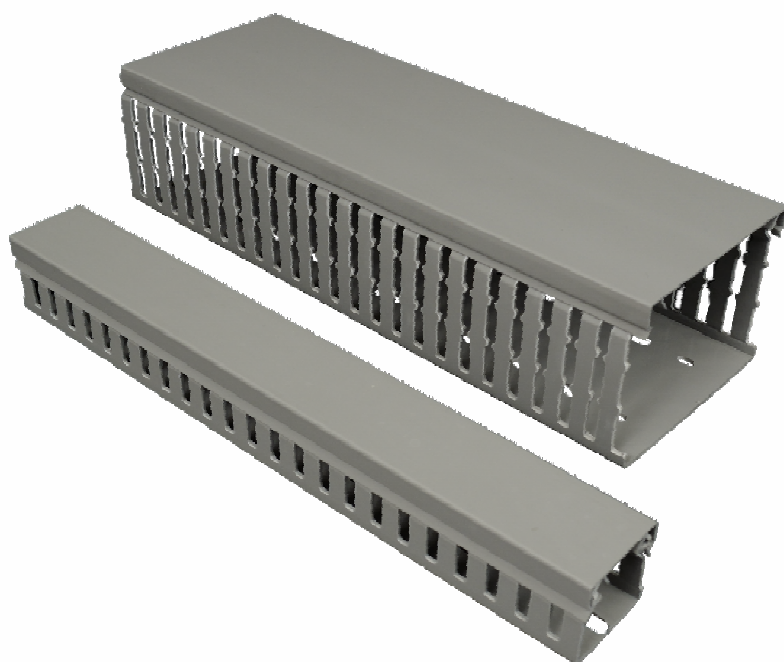


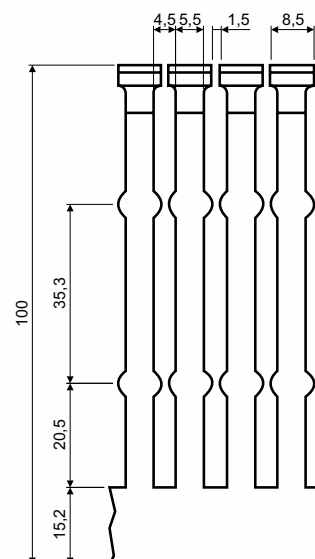



product description: Trunkings are supplied with cover.
Optimal closing, fixed cover. Easy installation and removal.
Rib can be easily broken out at the bottom of the trunking.

material: PVC - Pb-free, hard to inflame
self-snuffing: yes, within 30 s
temperature resistance - static: -20 - +60 °C
temperature resistance - dynamic: -5 - +60 °C
working temperature: >0 °C
dielectric strength: >30 kV/mm
fire class for underlying material: A1-F
colour: RAL 7030 gray
certification: EN 50085-1 ed.2:06, EN 50085-2-1:07
storage: ČSN 64 0090

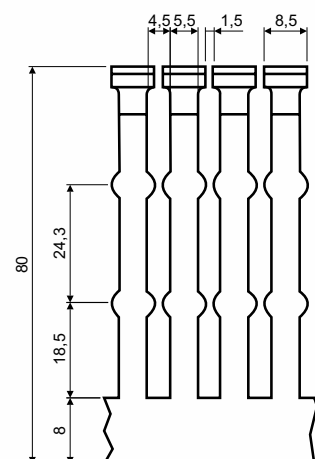

Perforation in two rows above the width of 80 mm.

Perforation in one row up to the width of 60 mm.

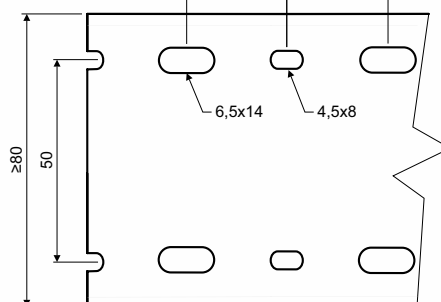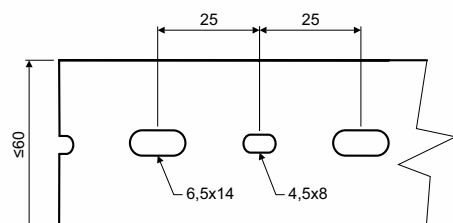

type number	outer width x height (mm)	inner width x height (mm)	length (m)	package (m)	number of conductors when 50% of the trunking capacity is filled		
					0,75 mm ² Ø2,8 mm	1 mm ² Ø2,9 mm	1,5 mm ² Ø3,2 mm
RK 30X30_LD	30 x 30	27 x 27	2	64	53	50	41
RK 30X40_LD	30 x 40	37 x 37	2	60	105	98	80
RK 40X60_LD	40 x 60	36 x 56	2	32	162	151	124
RK 60X60_LD	60 x 60	56 x 56	2	32	333	310	255
RK 80X60_LD	80 x 60	76 x 56	2	24	245	229	188
RK 100X60_LD	100 x 60	96 x 56	2	16	417	389	319
RK 40X80_LD	40 x 80	36 x 76	2	28	231	216	177
RK 60X80_LD	60 x 80	56 x 76	2	20	350	326	268
RK 40X100_LD	40 x 100	36 x 96	2	24	432	403	331
RK 80X100_LD	80 x 100	76 x 96	2	20	585	547	450