


Uchwyty obustronne do rur stalowych ČSN



Uchwyty przeznaczone są do zamocowania rur stalowych ČSN na podłożu.

pozycja	konf.	opis	D mm	L mm	a mm	t mm	d mm	 szt.	EAN
5213 PC	S	stal cynkowana metodą Sendzimira	20,4	44,5	10	0,8	4,3	100; 1300	8595057605008
5216 PC	S		22,5	45,5				100; 1100	8595057605015
5221 PC	S		28,3	55,3				100; 800	8595057605022
5229 PC	S		37	67,0	15	1,1	5,3	50; 350	8595057605039
5236 PC	S		47	83,0				50; 200	8595057605046
5242 PC	S		54	95,0				50; 150	8595057605053

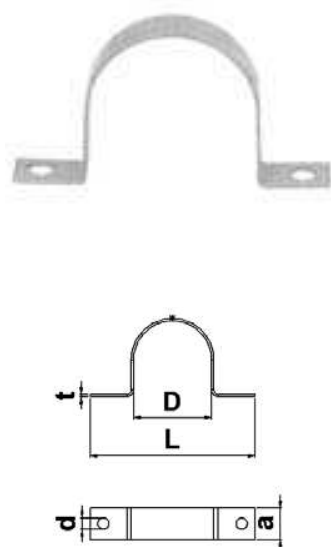

Uchwyty OMEGA do rur stalowych ČSN



Uchwyty przeznaczone są do zamocowania rur stalowych ČSN na podłożu.

Uchwyty dostarczane są również dla systemów z zachowaniem funkcjonalności w warunkach pożaru (patrz katalog Systemy z zachowaniem funkcjonalności w warunkach pożaru).

pozycja	konf.	opis	dn rury	d	di		EAN
			mm	mm	mm	szt.	
ZN							
5220 ZN	F	cynkowana żarowo poprzez zanurzenie	20,4; 22,5	6,4	19 - 24	1; 50	8595568915276
5225 ZN	F		28,3		24 - 29	1; 50	8595568915283
5232 ZN	F		37		29 - 38	1; 25	8595568915290
5250 ZN	F		47		38 - 47	1; 20	8595568915306
5263 ZN	F		54		47 - 55	1; 50	8595568915313
ZNM							
5220 ZNM	S	stal cynkowana metodą Sendzimira	20,4; 22,5	6,4	19 - 23	1; 100	8595057692091
5225 ZNM	S		28,3		24 - 28	1; 100	8595057692107
5232 ZNM	S		37		30 - 40	1; 100	8595057692114
5250 ZNM	S		47		39 - 52	1; 50	8595057692138
5263 ZNM	S		54		53 - 63	1; 50	8595057692145

