

ETIMAT 6 1p C6



Specifications

ETI Code	002141512
Description	ETIMAT 6 1p C6
Weight	.105
Level	Miniature circuit breakers MCB and accessories
Function	MCB
Short circuit capacity (kA)	6
Tripping characteristic	C
Rated current (A)	6
No. Of poles	1
Catalogue Group	ETIMAT 6 Miniature circuit breakers 6kA

Online product page [Link](#)

Other documentation



CE declaration

Technical data catalogue

3D Model




ETIM international clasification


Voltage type	AC
Built-in depth	mm
Nominal rated current	6 A
Nominal rated voltage	230V
Frequency	50/60Hz
Release characteristic	C
Number of poles	1
Current limiting class	
Over voltage category	
Pollution degree	
Width in number of modular spacings	
Degree of protection (IP)	
Number of protected poles	
Concurrently switching N-neutral	
Rated short-circuit breaking capacity EN 60898	6
Suitable for flush-mounted installation	
Additional equipment possible	
Number of poles (total)	1
Rated short-circuit breaking capacity Icn EN 60898 at 400 V	kA

Rated short-circuit breaking capacity Icn EN 60898 at 230 V	kA
Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V	kA


Melting energy characteristics

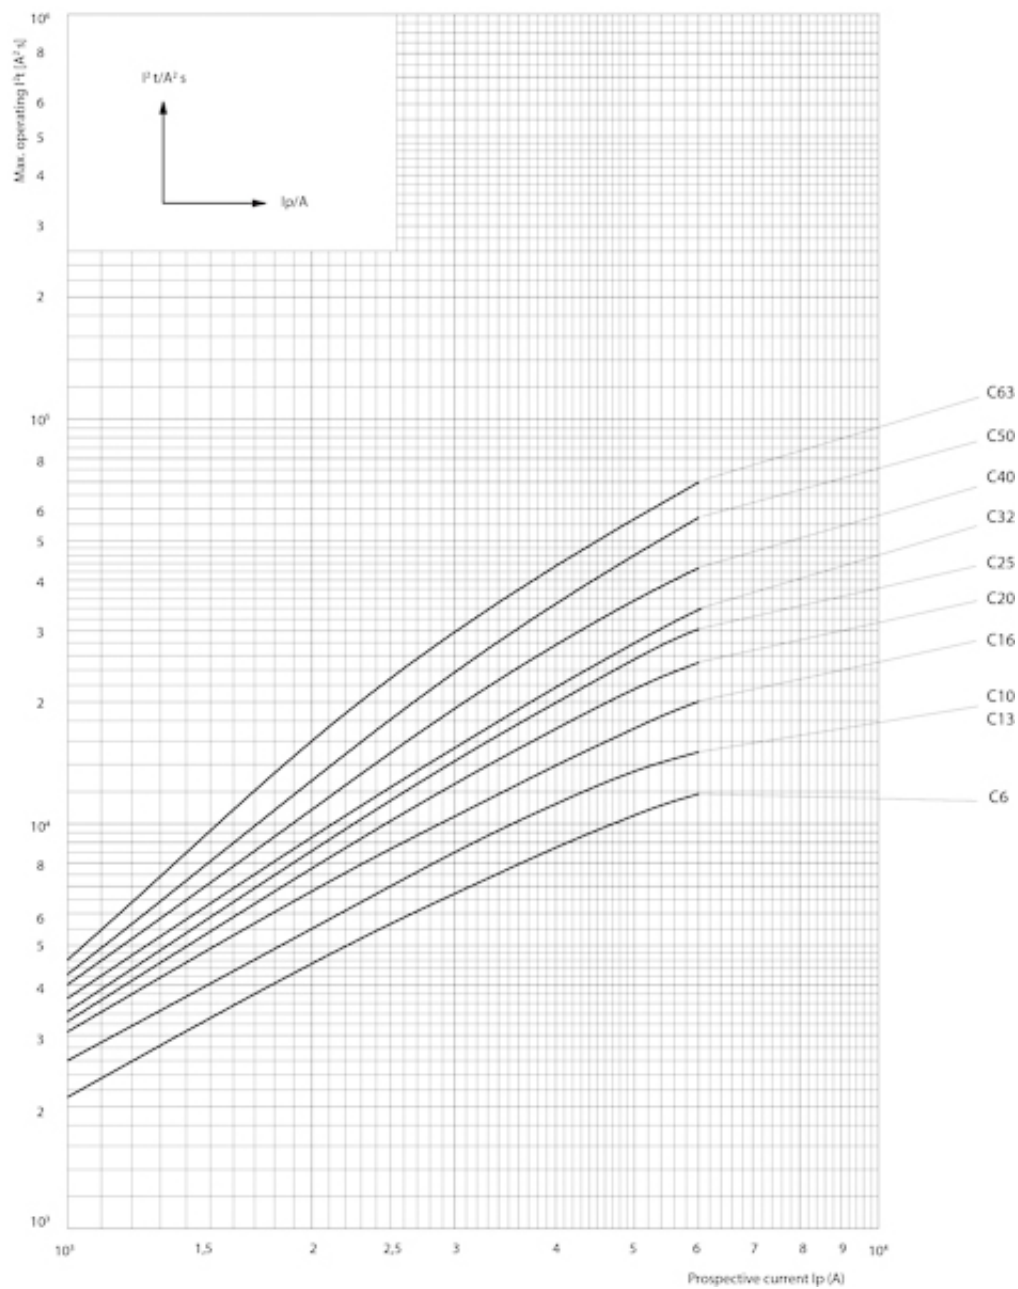

Time current characteristics

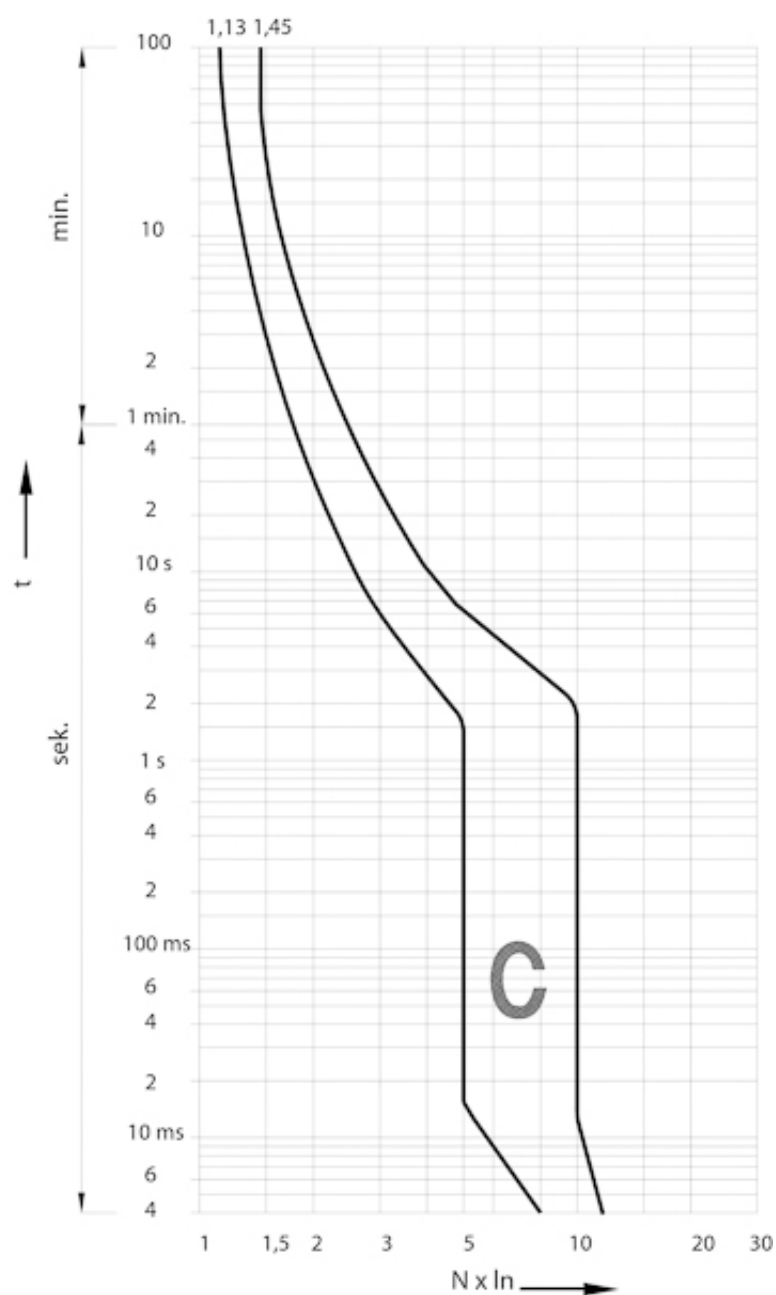

Dimension drawing

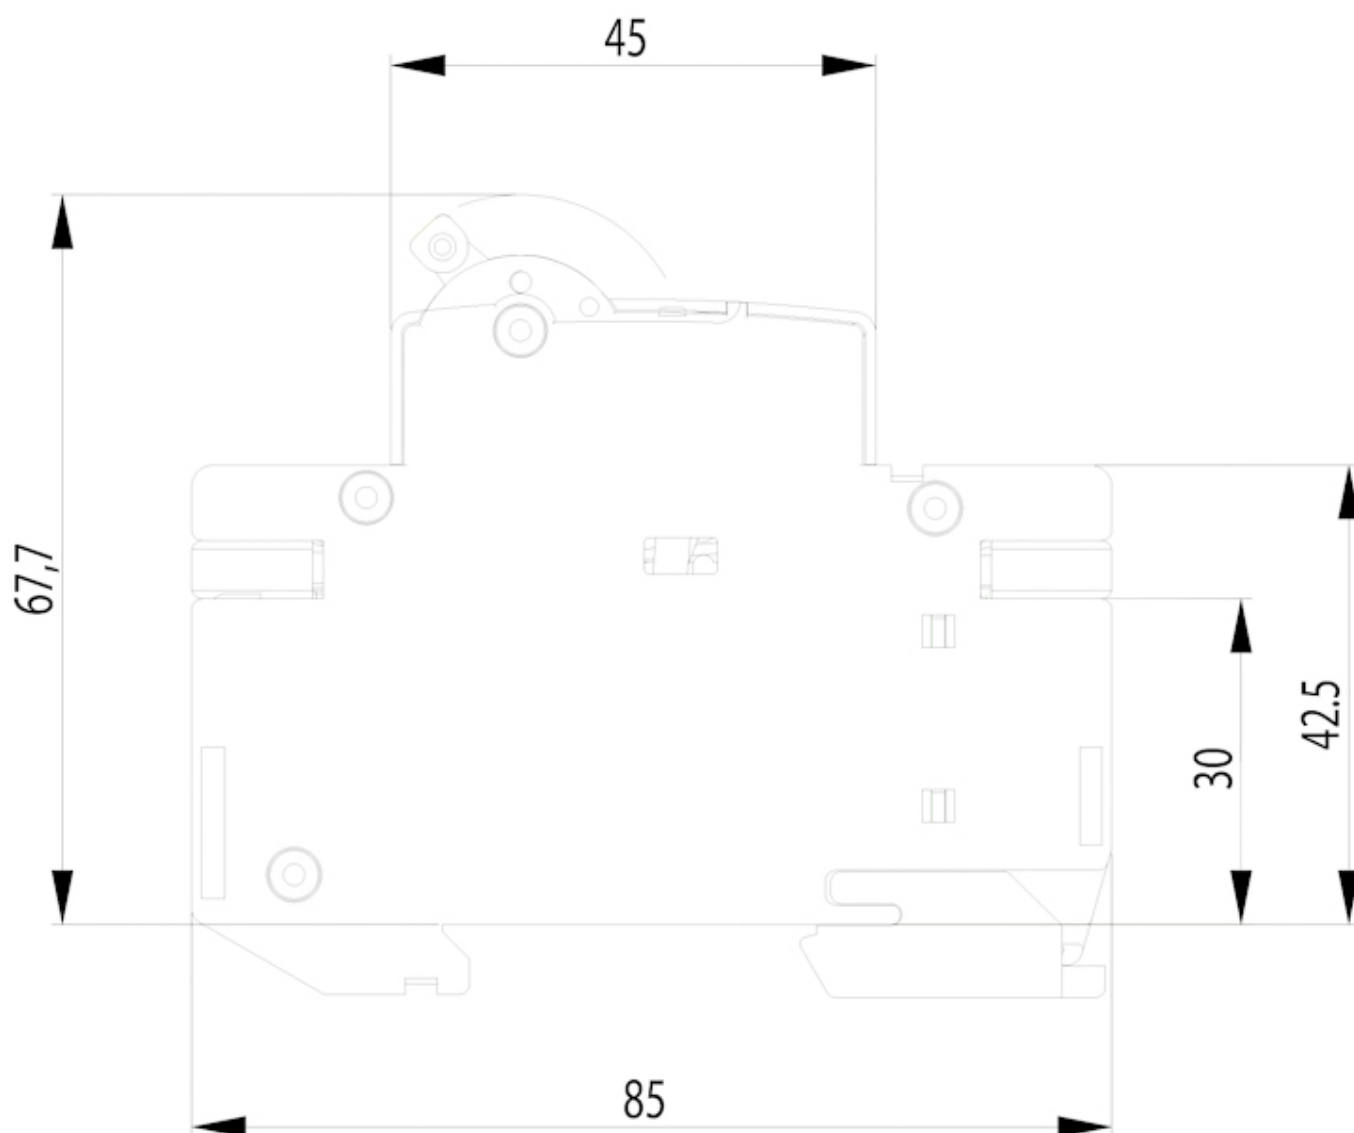


Symbol/Connection


1P




1P+N



2P



3P



3P+N

