

Type: **AZ-3-C80**
Article No.: **211801**



Instantaneous release response current $5 - 10 \times I_n$



Ordering information

Rated current	I_n	A	Max. 80
---------------	-------	---	---------

Notes concerning the product group



Switching capacity refer
to Technical Data

1-pole	2-pole
Depth 75 mm	Depth 75 mm
Width 27 mm	Width 54 mm



3-pole	4-pole; 3-pole +
Depth 75 mm	N
Width 81 mm	Depth 75 mm

Width
108 mm



Accessories

Auxiliary contacts

Voltage releases

Mounting accessories

General

Standards			
B, C, D characteristics			IEC/EN 60898, VDE 0641, DIN 43880
S, R characteristics			IEC/EN 60947-2, VDE 0660 Part 1, DIN 43880
Mechanical shock resistance shock duration 20 ms		g	20
Mounting position			As required
Direction of incoming supply			As required
Weight per pole		kg	0,24
Terminal capacities			
Solid or stranded		mm ²	1 × (2.5 – 50) 2 × (2.5 – 25)
Electrical		mm ²	2 × (2.5 – 16) 1 × (4 – 35)
Max. tightening torque		Nm	3

Contacts

Rated current = rated uninterrupted current	$I_n = I_u$	A	20 – 125
Overvoltage category/pollution degree			III/2
Rated operational voltage	U_e	V AC	230
DC			
B, C, D and R characteristic, per pole		V DC	60

Switching capacity

Rated ultimate short-circuit breaking capacity I_{cu} IEC/EN 60947-2, VDE 0641			
230 – 415 V AC			
B, C, D: 0.5 – 63	I_{cu}	kA	25


	<i>cos</i>		0,25
C, D: 80 – 100	I_{cu}	kA	20
	<i>cos</i>		0,3
C 125	I_{cu}	kA	15
	<i>cos</i>		0,5
Lifespan, mechanical	Operations		10000
Back-up protection			
With LV h.b.c. fuses 200 A gG/gL		kA	15 – 25
Notes			
Dimensions			

Notes

Terminal capacity:

Notes When using 2 conductors, the maximum admissible difference in cross-section is one size.

Dimensions

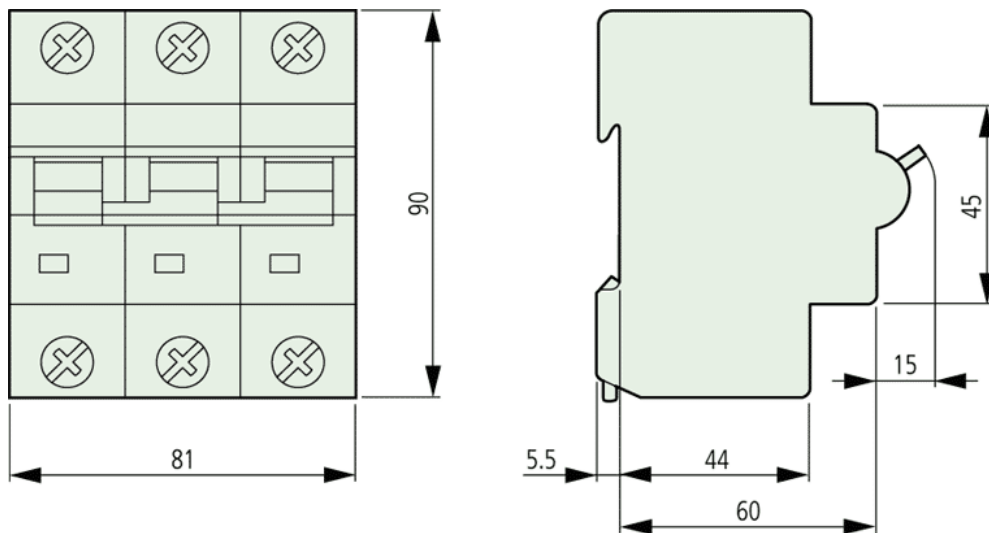

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn

E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>

Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3