


Rury osłonowe DVK®



Rysunek techniczny

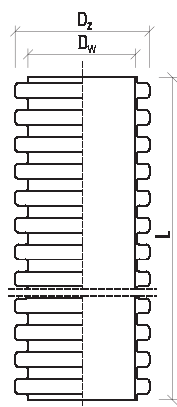

Dwuścienne, karbowane rury do ochrony kabli

-
-
-
-
-
-
-
-

Symbol produktu	D _z	D _w	L	Zestaw
	[mm]		[m]	
DVK 50	50	42	6,0	900
DVK 75	75	63	6,0	600
DVK 110	110	95	6,0	300
DVK 125	125	108	6,0	270
DVK 160	160	136	6,0	168
DVK 232	232	200	6,0	138

Symbol produktu	Odporność na ściskanie wg PN-EN 61386-24	Sztywność obwodowa SN wg PN-EN ISO-9969:2008
		[kN/m ²]
DVK 50	L450	13,0
DVK 75	N450	11,0
DVK 110	N450	9,0
DVK 125	N450	9,0
DVK 160	N450	8,0
DVK 232	N750	8,0

