


ZAŚLEPKI ZMG, ZPG - do otworów


RoHS
Compliant


materiał: poliamid 6,6,
 temperatura pracy: -40°C do +85°C,
 kolor: jasnoszary,
 grubość blachy: 0,8-3,2 mm,
 zgodność: UL 94V-2

Gwint metryczny						
typ	rozmiar gwintu	rozmiary [mm]				opako- wanie [szt.]
		A	B	C	D	
ZMG-12	M12 x 1,5	11,7	15,0	10,0	6,0	10
ZMG-16	M16 x 1,5	15,7	20,0	10,5	6,0	10
ZMG-20	M20 x 1,5	19,9	24,0	10,5	6,0	10
ZMG-25	M25 x 1,5	24,7	29,7	12,8	7,8	10
ZMG-32	M32 x 1,5	31,7	36,6	13,3	7,8	10
ZMG-40	M40 x 1,5	39,9	45,8	13,4	7,8	5
ZMG-50	M50 x 1,5	49,4	55,5	16,2	9,8	5
ZMG-63	M63 x 1,5	62,4	69,3	17,5	11,8	5

Gwint PG						
typ	rozmiar gwintu	rozmiary [mm]				opako- wanie [szt.]
		A	B	C	D	
ZPG-7	PG 7	12,2	14,8	10,0	6,0	10
ZPG-9	PG 9	15,1	18,7	10,4	6,0	10
ZPG-11	PG 11	18,5	21,7	10,4	6,0	10
ZPG-13,5	PG 13,5	20,3	23,7	10,3	6,0	10
ZPG-16	PG 16	22,3	27,0	10,3	6,0	10
ZPG-21	PG 21	28,2	32,8	12,8	7,8	10
ZPG-29	PG 29	37,0	44,1	13,3	7,8	10
ZPG-36	PG 36	47,0	52,6	13,7	7,7	5
ZPG-42	PG 42	54,0	59,5	16,3	9,6	5
ZPG-48	PG 48	59,6	64,2	18,0	11,8	5

DŁAWICE MPG, MMG - mosiężne


CE RoHS
Compliant IP68


materiał: mosiądz niklowany, wkładka z PA6,
 uszczelka oraz o-ring wykonana z NBR
 (kautczuk akrylonitrylo-butadienowy),
 temperatura pracy: -40°C do + 100°C (krótkotrwale do + 120°C)

typ	gwint AG	zakres średnicy przewodów [mm]	wewnętrzna średnica gwintu [mm]	rozmiar otworu [mm]	wymiar [mm]		mo- ment dokre- cenia [Nm]		rozmiar klucza	opakowanie zbiorcze [szt.]
					GL	H	dławnica	nakrętka		
MPG-7	PG-7	3-6,5	12,5	12,5-12,7	7	19	3	4	14	50
MPG-9	PG-9	4-8	15,2	15,2-15,4	8	20	5	6	17	50
MPG-11	PG-11	5-10	18,6	18,6-18,8	8	21	7	9	20/21	50
MPG-13,5	PG-13	6-12	20,4	20,4-20,6	8	22	8	10	22	50
MPG-16	PG-16	10-14	22,5	22,5-22,7	9	23	11	13	24	25
MPG-21	PG-21	13-18	28,3	28,3-28,5	9	27	18	22	30	25
MPG-29	PG-29	18-25	37	37,0-37,2	11	31	31	40	40	20
MPG-36	PG-36	25-33	47	47,0-47,2	12	37	53	60	50	10
MPG-42	PG-42	32-38	54	54,0-54,2	13	38	53	60	57	5
MPG-48	PG-48	37-44	59,3	59,3-59,5	14	38	53	60	64	5

typ	gwint AG	zakres średnicy przewodów [mm]	wewnętrzna średnica gwintu [mm]	rozmiar otworu [mm]	wymiar [mm]		moment dokręcenia [Nm]		rozmiar klucza
					GL	H	dławica	nakrętka	
MMG-12	M12x1,5	3-6,5	12	12-12,2	7	19	3	4	14
MMG-16	M16x1,5	4-8	16	16-16,2	8	20	5	6	18
MMG-20	M20x1,5	6-12	20	20-20,2	8	22	8	10	22
MMG-25	M25x1,5	8-16	25	25-25,2	9	27	12	14	27
MMG-32	M32x1,5	15-22	32	32-32,2	10	29	20	24	35
MMG-40	M40x1,5	18-25	40	40-40,2	11	31	34	40	45
MMG-50	M50x1,5	27-35	50	50-50,2	12	38	53	60	50/55
MMG-63	M63x1,5	37-44	63	63-63,2	13	38	53	60	64/68
MMG-75	M75x2,0	42-52	75	75-75,2	15	42	53	60	77

DŁAWICE EMC - metalowe - do przewodów ekranowanych

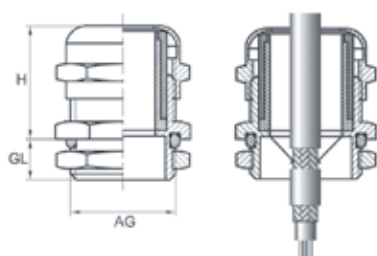

materiał; korpus: mosiądz, niklowany
 wkładka zaciskowa: poliamid 6
 uszczelka: NBR (kautczuk nitrylowy)
 O-ring: NBR (kautczuk nitrylowy)
 stopień ochrony: IP 68
 temperatura pracy: od -40°C do +100°C,
 krótkotrwale do +120°C
 zgodność: EN 50262: 02

typ	gwint AG	średnica przewodu [mm]	wewnętrzny rozmiar gwintu [mm]	średnica otworu [mm]	rozmiary [mm]		moment dokręcenia [Nm]		wielkość klucza [mm]
					GL	H	korpus	nakrętka	
MMG-12-EMC	M12x1,5	3-6,5	12	12-12,2	7	19	3	4	14
MMG-16-EMC	M16x1,5	4-8	16	16-16,2	8	20	5	6	18
MMG-20-EMC	M20x1,5	6-12	20	20-20,2	8	22	8	10	22
MMG-25-EMC	M25x1,5	13-18	25	25-25,2	9	27	12	14	30/27
MMG-32-EMC	M32x1,5	15-22	32	32-32,2	10	29	20	24	35
MMG-40-EMC	M40x1,5	18-25	40	40-40,2	11	31	34	40	40/45
MMG-50-EMC	M50x1,5	27-35	50	50-50,2	12	38	53	60	50/55
MMG-63-EMC	M63x1,5	37-44	63	63-63,2	13	38	53	60	64/68

typ	gwint AG	średnica przewodu [mm]	wewnętrzny rozmiar gwintu [mm]	średnica otworu [mm]	rozmiary [mm]		moment dokręcenia [Nm]		wielkość klucza [mm]
					GL	H	korpus	nakrętka	
MPG-7-EMC	PG-7	3-6,5	12,5	12,5-12,7	7	19	3	4	14
MPG-9-EMC	PG-9	4-8	15,2	15,2-15,4	8	20	5	6	17
MPG-11-EMC	PG-11	5-10	18,6	18,6-18,8	8	21	7	9	20/21
MPG-13,5-EMC	PG-13,5	6-12	20,4	20,4-20,6	8	22	8	10	22
MPG-16-EMC	PG-16	10-14	22,5	22,5-22,7	9	23	11	13	24
MPG-21-EMC	PG-21	13-18	28,3	28,3-28,5	9	27	18	22	30
MPG-29-EMC	PG-29	18-25	37	37,0-37,2	11	31	31	40	40