


Product Specification Sheet

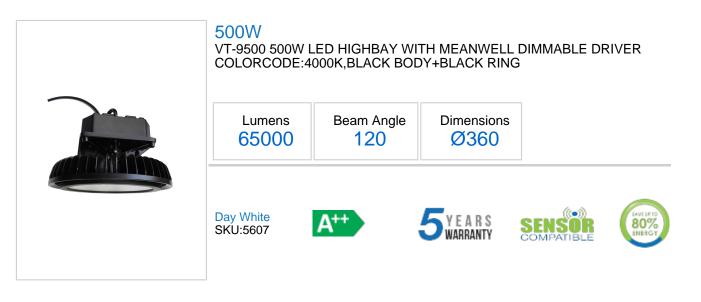

Technical Information

| Instant Start: | 0-100% in lt1s | | IP Rating: | IP65 |
|----------------|--------------------|---|------------------------|-----------------|
| Watts: | 500 | | Dimmable: | Yes |
| Lumens: | 65000 | | Warranty (Years): | 5 |
| Beam Angle: | 120 | | PF: | >0.9 |
| Unit Color: | Black | | CRI: | >80 |
| Body Type: | Die Cast Aluminium | m | Operation Temperature: | -25 to +50°c |
| Energy Rating: | A++ | | Input Power: | AC:90-295V,50Hz |
| Long life: | 50,000 Hours | | Sensor Compatibility: | Yes |
| | OND | | | |

LED Chip Type: SMD

Features

- High performance LED chips
- Powerful LED light source with a unique design
- Radiator integrated cooling fins for efficient heat dissipation
- Beam Angle's to choose from 90°/120°
 - UFO Highbay has Shatter Proof Perspex Lens
 - Longevity and efficient lumen Maintenance
 - Available in 50W, 100W, 150W, 200W and 500W
 - Applications Industrial Usage, Warehouse & Super Markets, Workshop's, Factories, Warehouse's and many more



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

| Unit Details | | Listing Details | |
|-----------------------------------|----------|-----------------|---------------|
| Net Weight | 10.4 | EAN Code | 3800157625050 |
| Gross Weight(GW) Kgs | 11.8 | Commodity Code | 9405403990 |
| Length(Box)mm | 440 | | |
| Width(Box)mm | 440 | | |
| Height(Box)mm | 265 | | |
| Unit CBM | 0.051304 | | |
| Master Box Packaging | | | |
| Master Box Qty (Pcs Per Carton) 1 | | | |
| Qty Per Pallet | 24 | | |
| | | | |

