


Product Specification Sheet

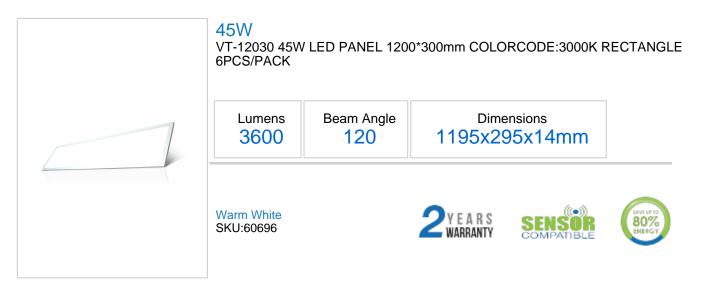

Technical Information

stant Start:	0-100% in It1s		IP Rating:	IP20
s:	45		Dimmable:	No
ens:	3600		Warranty (Years):	2
	Rectangle		PF:	>0.9
ngle:	120		CRI:	>80
r:	PKW		Operation Temperature:	-25 to +50°c
pe:	Aluminium + PMMA + PS	3	Input Power:	AC:200-240V,50/60
	20,000 Hours		Sensor Compatibility:	Yes
nip Type:	SMD			

Features

- Compare with incandescent, it can save over 80% electric cost
- Contemporary & Elegant Design
 - Higher Light Transmission Rate
 - Easy to install Plug and play version
 - Dimmable options available
 - High quality power driver ensures reliable lifetime
 - Controlled Glare rating values for comfortable commercial applications
 - Range of Sizes to suit different workspaces
 - Instant Start 0-100% in
 - No flickering, No U.V Radiation
 - No Lead or Mercury content hence Environment friendly
 - Application Office, Conference Room, Showroom, Lobby, Cabin, Kitchen etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

Unit Details		Listing Details	
Gross Weight(GW) Kgs	22	EAN Code	3800157609326
Length(Box)mm	330	Commodity Code	9405403990
Width(Box)mm	150		
Height(Box)mm	1310		
Unit CBM	0.06435		
Master Box Packaging			
Master Box Qty (Pcs Per Carton)	6		
Qty Per Pallet	17		

