


Product Specification Sheet

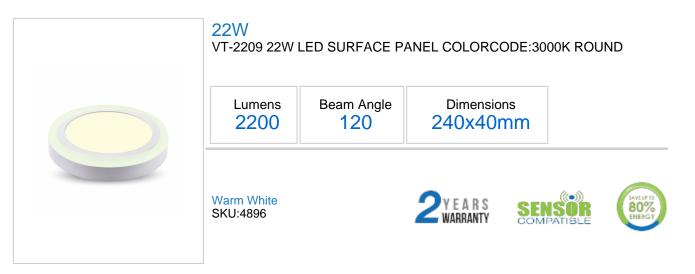

Technical Information

Instant Start:	0-100% in lt1s
Vatts:	22
mens:	2200
ape:	Round
n Angle:	120
Color:	White
ly Type:	Aluminium
ng life:	20,000 Hours
ED Chip Type:	SMD

Features

- Compare with incandescent, it can save over 80% electric cost
- Contemporary & Elegant Design
 - Higher Light Transmission Rate
 - Easy to install Plug and play version
 - Dimmable options available
 - High quality power driver ensures reliable lifetime
 - Controlled Glare rating values for comfortable commercial applications
 - Range of Sizes to suit different workspaces
 - Instant Start 0-100% in
 - No flickering, No U.V Radiation
 - No Lead or Mercury content hence Environment friendly
 - Application Office, Conference Room, Showroom, Lobby, Cabin, Kitchen etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

Unit Details		Listing Details	
Gross Weight(GW) Kgs	0.8	EAN Code	3800157602655
Length(Box)mm	290	Commodity Code	9405403990
Width(Box)mm	290		
Height(Box)mm	75		
Unit CBM	0.0040542		
Master Box Packaging			
Master Box Qty (Pcs Per Carton)	20		
Qty Per Pallet	240		

