


DŁAWICE - kablowe z gwintem PG





RoHS
 Compliant IP68

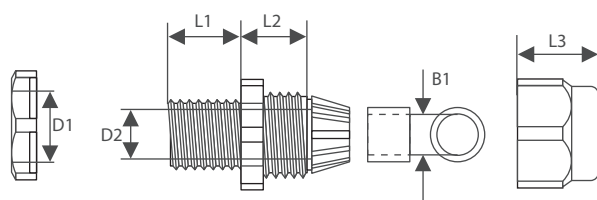

materiał: poliamid 6.6 + PVC,
 temperatura pracy: -40°C do +85°C (krótkotrwale do +120°C)
 kolor: jasnoszary RAL 7035


typ	D1 [mm]	D2 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	B1 [mm]	zakres średnic przewodów [mm]	ilość w opak. [szt.]
PG-7	11,3	8,0	7,7	12,9	13,4	4,5	3,5-6	50
PG-9	14,0	10,7	7,7	13,8	14,7	6,4	4-8	50
PG-11	17,5	13,7	7,8	16,2	17,9	8,3	5-10	50
PG-13,5	18,8	15,3	8,7	16,9	18,8	11,1	6-12	50
PG-16	21,0	17,4	10,0	16,8	19,6	12,4	10-14	50
PG-21	27,1	23,9	10,4	18,5	23,8	15,2	13-18	50
PG-29	35,8	30,6	11,1	21,2	27,2	23,7	18-25	25
PG-36	45,4	38,0	15,3	23,8	29,9	32,2	22-32	10
PG-42	53,0	46,2	15,4	28,4	31,3	41,1	30-38	10
PG-48	56,5	48,8	15,6	25,3	31,4	44,3	34-44	10

DŁAWICE MG - z gwintem metrycznym





RoHS
 Compliant IP68

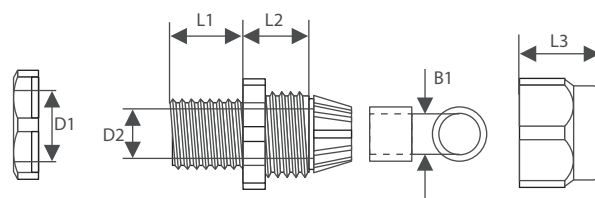

materiał: poliamid 6.6 + PVC,
 temperatura pracy: -40°C do +85°C (krótkotrwale do +120°C)
 kolor: jasnoszary RAL 7035


typ	D1 [mm]	D2 [mm]	B1 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	zakres średnic kabli [mm]	ilość w opak. [szt.]
MG-12	12,0	8,3	5,0	7,9	12,1	13,3	3,0-6,5	50
MG-16	16,0	10,9	9,6	14,4	14,4	16,7	5,0-10,0	50
MG-20	20,0	14,8	12,9	12,8	19,5	18,4	10,0-14,0	50
MG-25	25,0	18,5	16,5	13,9	19,5	22,3	13,0-18,0	50
MG-32	32,0	25,9	23,3	14,6	20,3	26,1	18,0-25,0	25
MG-40	40,0	31,4	30,6	17,7	23,4	31,9	22,0-32,0	10
MG-50	50,0	41,2	38,2	17,3	25,7	31,6	30,0-38,0	10
MG-63	63,0	54,1	42,4	18,6	26,2	32,6	34,0-44,0	5

DŁAWICE PGB - kablowe z gwintem PG, w kolorze czarnym





RoHS
 Compliant IP68

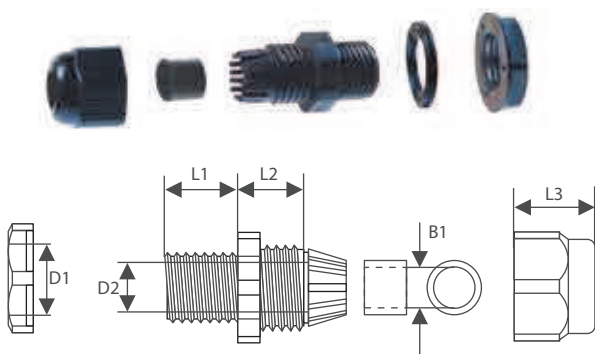

materiał: poliamid 6.6 + PVC + barwnik
temperatura pracy: -40°C do + 85°C (krótkotrwale do +120°C)
kolor: czarny

typ	D1 [mm]	D2 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	B1 [mm]	zakres średnic przewodów [mm]	opakowanie [szt.]
PG-7B	11,3	8,0	7,7	12,9	13,4	4,5	3,5-6	50
PG-9B	14,0	10,7	7,7	13,8	14,7	6,4	4-8	50
PG-11B	17,5	13,7	7,8	16,2	17,9	8,3	5-10	50
PG-13,5B	18,8	15,3	8,7	16,9	18,8	11,1	6-12	50
PG-16B	21,0	17,4	10,0	16,8	19,6	12,4	10-14	50

DŁAWICE MGEO - kablowe z elastyczną odgiętką



CE RoHS Compliant IP68




materiał: poliamid 66,
temperatura pracy: -40°C do +85°C,
kolor: jasnoszary,
zgodne z UL 94V-2,
zgodne z EN-50262:02

typ	średnica otworu [mm]	skok gwintu	rozmiary [mm]					zakres dla wienia przewodów [mm]	opakowanie [szt.]
			D	B1	L1	L2	L3		
MGEO-12	12	1,25	8,3	6,9	7,9	19,6	53,3	3-6,5	10
MGEO-16	16	1,5	10,9	10,5	15,5	23,4	74,4	5-10	10
MGEO-20	20	1,5	15,0	14,0	15,0	28,5	96,2	10-14	10
MGEO-25	25	1,5	18,6	18,4	15,2	29,4	111,2	13-18	10

ZASŁEPKI ZDK - do dławic kablowych



RoHS Compliant

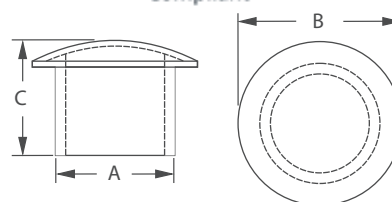

materiał: poliamid 6.6 + barwnik
kolor: czarny

typ	dla dławic		rozmiary [mm]			opakowanie [szt.]
			A	B	C	
ZDK-6	PG-7/PG9	MG-12	6,0	10,2	15,5	10
ZDK-9	PG-11/PG13,5	MG-16	9,5	15,6	15,5	10
ZDK-13	PG-16	MG-20	13,5	19,6	16,5	10
ZDK-17	PG-21	MG-25	17,5	24,4	17,0	10
ZDK-24	PG-29	MG-32	24,5	32,5	17,5	10
ZDK-31	PG-36	MG-40	31,5	41,5	18,0	5
ZDK-38	PG-42	MG-50	38,9	47,2	18,0	5
ZDK-41	PG-48	MG-63	43,5	52,5	19,0	5