

T022050

T022095

T022150

T022240



1.5 ... 50 mm²

6 ... 95 mm²

25 ... 150 mm²

35 ... 240 mm²


Nr kat. - kolor / No. Cat. - Colour	1.5 ... 50 mm ²			6 ... 95 mm ²			25 ... 150 mm ²			35 ... 240 mm ²		
Szary / Grey ●	T022050			T022095			T022150			T022240		
Niebieski / Blue ●	T022050.B			T022095.B			T022150.B			T022240.B		
Zielono-żółty / Green yellow ●	T022050.YG			T022095.YG			T022150.YG			T022240.YG		
Norma / Norm	SFS 2663			SFS 2663			SFS 2663			SFS 2663		
Certyfikaty / Certificates	CE			CE			CE			CE		
Przekrój znamionowy / Cross section												
Przewód aluminiowy lub miedziany Aluminium and Cooper cables	1.5 ... 50 mm ²			6 ... 95 mm ²			25 ... 150 mm ²			35 ... 240 mm ²		
Dane prądowe / Rated date												
Napięcie znamionowe / Rated voltage	690 V			690 V			690 V			690 V		
Prąd znamionowy / Current	320 A			490 A			640 A			850 A		
Wymiary zewnętrzne / Dimensions												
	L=49, L1=48, L2=35, H=43, H1=10, H2=12.5, W=30, W1=10, AV=5			L=84, L1=56, L2=35, L3=72, H=51, H1=11, H2=16, H3=5, W=42, W1=13, W2=17.5, AV=5, D=5.5			L=84, L1=56, L2=35, L3=72, H=54, H1=11, H2=20, H3=5, W=51, W1=18.5, W2=21, AV=5, D=5.5			L=106, L1=78, L2=35, L3=94, H=65, H1=13, H2=23.5, H3=5, W=60, W1=20, W2=27, AV=6, D=5.5		
Moment obr. dokręcania / Tightening torque range												
	1.5 Nm (1.5 ... 2.5 mm ²) 5 Nm (4 ... 10 mm ²) 12 Nm (16 ... 50 mm ²)			12 Nm (6 ... 25 mm ²) 22 Nm (35 ... 95 mm ²)			14 Nm (25 ... 50 mm ²) 30 Nm (70 ... 150 mm ²)			26 Nm (35 ... 120 mm ²) 55 Nm (150 ... 240 mm ²)		
Montaż / Montage	TS 35			TS 35, podłoże			TS 35, podłoże			TS 35, podłoże		
Masa / Weight	90 g			125 g			170 g			340 g		
Opakowanie zbiorcze / Collective package	1 szt.			1 szt.			1 szt.			1 szt.		
Wyposażenie opcjonalne / Optional equipment	Ozn. handl.	Nr kat.	Op. zb.	Ozn. handl.	Nr kat.	Op. zb.	Ozn. handl.	Nr kat.	Op. zb.	Ozn. handl.	Nr kat.	Op. zb.
Oznacznik szynowy / Rail marking												
	T 900	17 900 302	50 szt.	T 900	17 900 302	50 szt.	T 900	17 900 302	50 szt.	T 900	17 900 302	50 szt.
	T 927	17 927 302	50 szt.	T 927	17 927 302	50 szt.	T 927	17 927 302	50 szt.	T 927	17 927 302	50 szt.
Płytki krańcowe / End bracket												
	T 910	17 910 312	50 szt.	T 910	17 910 312	50 szt.	T 910	17 910 312	50 szt.	T 910	17 910 312	50 szt.
	T 940	17 940 312	50 szt.	T 940	17 940 312	50 szt.	T 940	17 940 312	50 szt.	T 940	17 940 312	50 szt.
Pasta kontaktowa / Contact grease												
	SR-1	89 764 000	1 szt. (250 ml)	SR-1	89 764 000	1 szt. (250 ml)	SR-1	89 764 000	1 szt. (250 ml)	SR-1	89 764 000	1 szt. (250 ml)

Zacisk rozgałęźny:
1-tor
4-otwory zaciskowe


Zacisk rozgałęźny:
1-tor
4-otwory zaciskowe

Zacisk rozgałęźny:
1-tor
4-otwory zaciskowe

Zacisk rozgałęźny:
1-tor
4-otwory zaciskowe

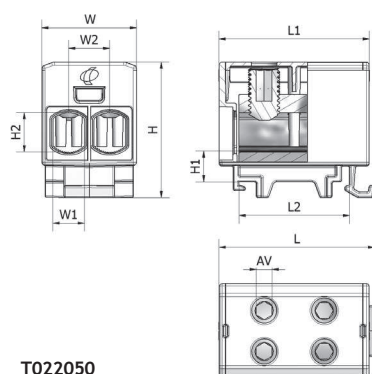

T022050

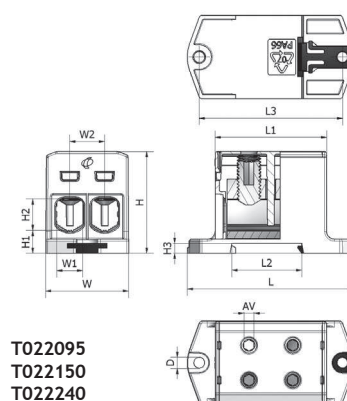

T022095
T022150
T022240