



Technical data sheet T 350, plug-in seal



The junction boxes are made of a thermoplastic polypropylene polymer with plug-in seals made of ethylene vinyl acetate (EVA). This allows installation of cables either directly through the 16x M32 + 8x M40 seals, or the seals can be cut with a knife at the pre-marked points, in order to create an insertion opening for cables or pipes. Alternatively, cable glands can be pushed through the openings instead of the seals and locked with a locknut from the inside. The junction boxes can be mounted on mounting plates in the openings on the floor using steel screws 3.5 x 9.5. Clear internal dimensions: 267 x 182 x 110 mm. Cover with labelling panel and lead-sealed.

Standard version: flame-resistant, testing temperature 650 °C.

F version: highly flame-resistant, testing temperature 960 °C.

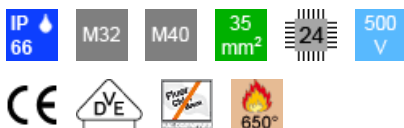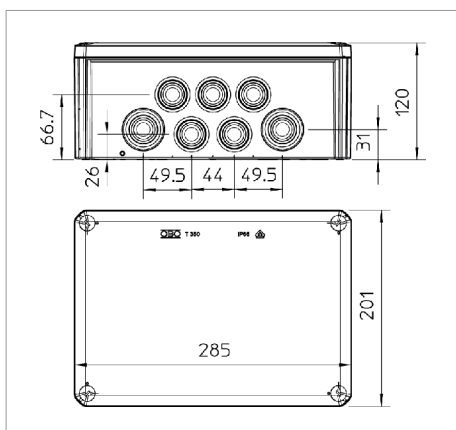

Type	Version	Entries	Colour	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
T 350	Standard	16 x M32 8 x M40	Light grey; RAL 7035	5	1	63.000	2007125
T 350 RW		16 x M32 8 x M40	Pure white; RAL 9010	5	1	63.000	2007568
T 350 F	960 °C flame-resistant	16 x M32 8 x M40	Light grey; RAL 7035	5	1	63.000	2007371
T 350 RO-LGR	With red lid	16 x M32 8 x M40	Red grey	5	1	63.000	2007665
T 350 UV RW	UV-resistant	16 x M32 8 x M40	Pure white; RAL 9010	5	1	63.000	2007420
T 350 KL	With terminal strip	16 x M32 8 x M40	Light grey; RAL 7035	5	1	120.000	2007448

PP/GR Polypropylene, fibreglass-reinforced

E /100 pc.