




VIP LED

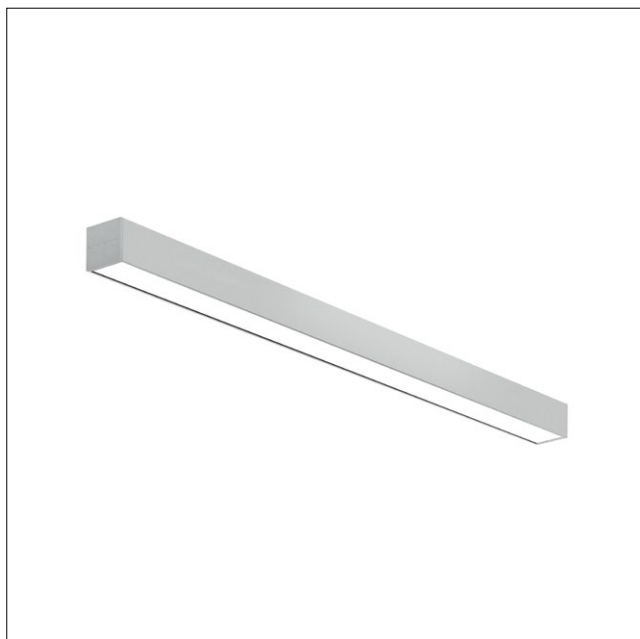

A modern line of system luminaires made of aluminum profile with high resistance parameters. The direct (DI) lighting beam can be obtained by means of microprismatic diffuser. Thanks to the series of additional mounting accessories the luminaires can be easily mounted and offer many different universal configurations.

Materials: Powder painted aluminum profile (grey color in standard), OPAL or MPRM diffuser.

Installation: Surface mounted, wall mounted, suspended.

Accessories: Joints (linear, 90°, T, X, Y, wall, ceiling); suspensions (simple, electric), end caps.

Power: 230V, the quick-release 5-pole connection block allows to join the luminaires in line.

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
For through out powering	Yes
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Type of installation	Universal
Housing material	Aluminum
Designed for light-line	Yes

INFORMATION

Colour	Grey
Operating temperature range	-15 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP20
Degree of protection (IP) / top/	IP20
Class of protection	I
Energy class	A+
CE	Yes
PZH	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

OPTICAL DATA


Reflector	High gloss
-----------	------------

AVAILABLE VARIANTS

Product code	Luminaire power [W]		Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4070101	17	OPAL	1380	81	3000K	1.50
PX4070108	17	OPAL	1410	83	4000K	1.50
PX4070115	24	OPAL	2070	86	3000K	2.20

AVAILABLE VARIANTS

Product code	Luminaire power [W]		Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4070122	24	OPAL	2110	88	4000K	2.20
PX4070129	31	OPAL	2760	89	3000K	2.80
PX4070136	31	OPAL	2820	91	4000K	2.80
PX4070143	38	OPAL	3450	91	3000K	3.40
PX4070150	38	OPAL	3520	93	4000K	3.40
PX4070157	44	OPAL	4140	94	3000K	4.10
PX4070164	44	OPAL	4220	96	4000K	4.10
PX4070171	52	OPAL	4830	93	3000K	4.80
PX4070178	52	OPAL	4930	95	4000K	4.80
PX4070201	17	MPRM	2040	120	3000K	1.50
PX4070208	17	MPRM	2080	122	4000K	1.50
PX4070215	24	MPRM	3070	128	3000K	2.20
PX4070222	24	MPRM	3130	130	4000K	2.20
PX4070229	31	MPRM	4080	132	3000K	2.80
PX4070236	31	MPRM	4170	135	4000K	2.80
PX4070243	38	MPRM	5100	134	3000K	3.40
PX4070250	38	MPRM	5210	137	4000K	3.40
PX4070257	44	MPRM	6130	139	3000K	4.10
PX4070264	44	MPRM	6260	142	4000K	4.10
PX4070271	52	MPRM	7150	138	3000K	4.80
PX4070278	52	MPRM	7300	140	4000K	4.80



DIMENSIONS

L [mm]	W [mm]	H [mm]	OPAL	MPRM
585	65	65	PX4070101 PX4070108	PX4070201 PX4070208
875	65	65	PX4070115 PX4070122	PX4070215 PX4070222
1165	65	65	PX4070129 PX4070136	PX4070229 PX4070236
1455	65	65	PX4070143 PX4070150	PX4070243 PX4070250
1745	65	65	PX4070157 PX4070164	PX4070257 PX4070264
2035	65	65	PX4070171 PX4070178	PX4070271 PX4070278

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

A [mm]	OPAL	MPRM
525	PX4070101 PX4070108	PX4070201 PX4070208
645	PX4070115 PX4070122	PX4070215 PX4070222
935	PX4070129 PX4070136	PX4070229 PX4070236
1225	PX4070143 PX4070150	PX4070243 PX4070250
1515	PX4070157 PX4070164	PX4070257 PX4070264
1805	PX4070171 PX4070178	PX4070271 PX4070278

A = Spacing length

ACCESSORIES

Electric element



Electrical suspension
Pieces in set: 1

PX0922021

Grey

PX0922032

White

Structural element



VIP 3F - 3-phase electrical track

PX0922332

Grey

Structural element



VIP Opal End cap ALU

PX0922318

1x

Grey



VIP End cap made of PC

PX0922341

logo PXF
Lighting

White

PX0922344

logo PXF
Lighting

Grey

PX0922347

logo PXF
Lighting

Black

PX0922350

White

PX0922353

Grey

PX0922356

Black



VIP LED MPRM End cap ALU

PX0922327

1x

Grey

Connecting element



VIP 90° joint

PX0922248

1x

Grey



VIP T joint

PX0922275

1x

Grey



VIP Cross joint

PX0922283

1x

Grey

Connecting element



Sigma/Velo/VIP/VIP G/K Invisible linear joint
Set (2 pcs)
Pieces in set: 2

PX0922227

Grey



VIP Y joint

PX0922285

1x

Grey

Installation element



VIP Wall joint 1x/2x Set (2 pcs)
Pieces in set: 2

PX0922206

Grey



VIP Ceiling joint Set (2 pcs)
Pieces in set: 2

PX0922164

1x

Grey



Simple suspension

PX0922143